


Anbotek Compliance Laboratory Limited

Voltage Mains FCC PART CLASS B

EUT: XXXX M/N:24V,16.6A
 Manufacturer: XXXX
 Operating Condition: FULL LOAD
 Test Site: 1# Shielded Room
 Operator: Allen Peng
 Test Specification: AC 110V/60Hz
 Comment: L
 Temp.=22.2 Hum.=55%

SCAN TABLE: "Voltage(150K~30M)FIN"

Short Description: 150K-30M Disturbance Voltages

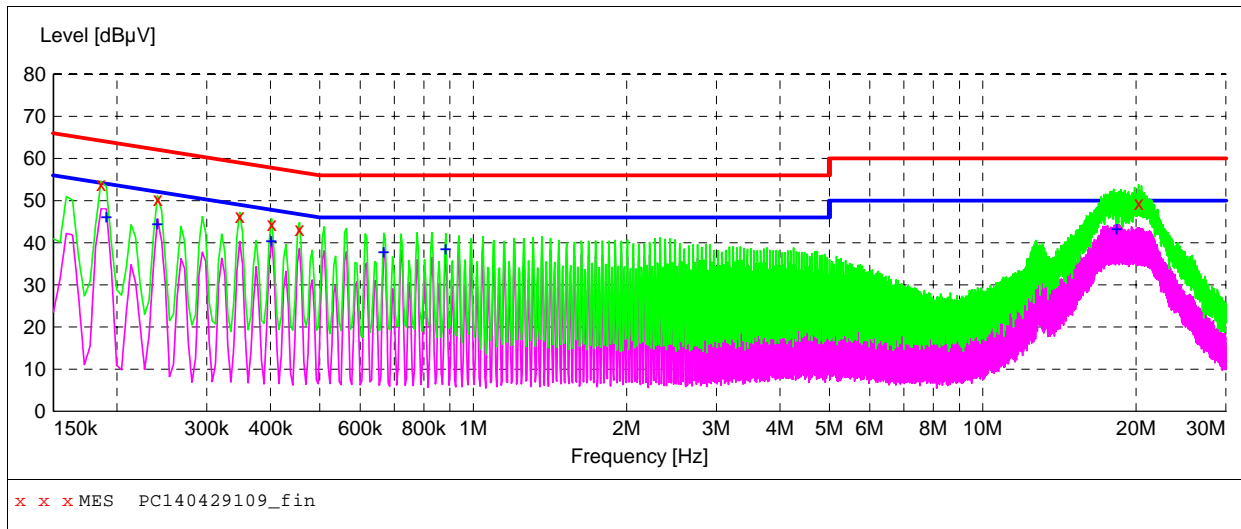

MEASUREMENT RESULT: "PC140429109_fin"

4/29/2014 5:54PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.186000	53.80	20.1	64	10.4	QP	L1	GND
0.240000	50.40	20.1	62	11.7	QP	L1	GND
0.348000	46.30	20.1	59	12.7	QP	L1	GND
0.402000	44.40	20.1	58	13.4	QP	L1	GND
0.456000	43.30	20.1	57	13.5	QP	L1	GND
20.228500	49.40	20.8	60	10.6	QP	L1	GND

MEASUREMENT RESULT: "PC140429109_fin2"

4/29/2014 5:54PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.190500	46.30	20.1	54	7.7	AV	L1	GND
0.240000	44.70	20.1	52	7.4	AV	L1	GND
0.402000	40.70	20.1	48	7.1	AV	L1	GND
0.667500	38.00	20.1	46	8.0	AV	L1	GND
0.883500	38.70	20.1	46	7.3	AV	L1	GND
18.334000	43.50	20.8	50	6.5	AV	L1	GND