


**Anbotek Compliance Laboratory Limited**

**Voltage Mains FCC PART CLASS B**

EUT: XXXX M/N:24V,16.6A  
 Manufacturer: XXXX  
 Operating Condition: FULL LOAD  
 Test Site: 1# Shielded Room  
 Operator: Allen Peng  
 Test Specification: AC 110V/60Hz  
 Comment: N  
 Temp.=22.2 Hum.=55%

**SCAN TABLE: "Voltage(150K~30M)FIN"**

Short Description: 150K-30M Disturbance Voltages

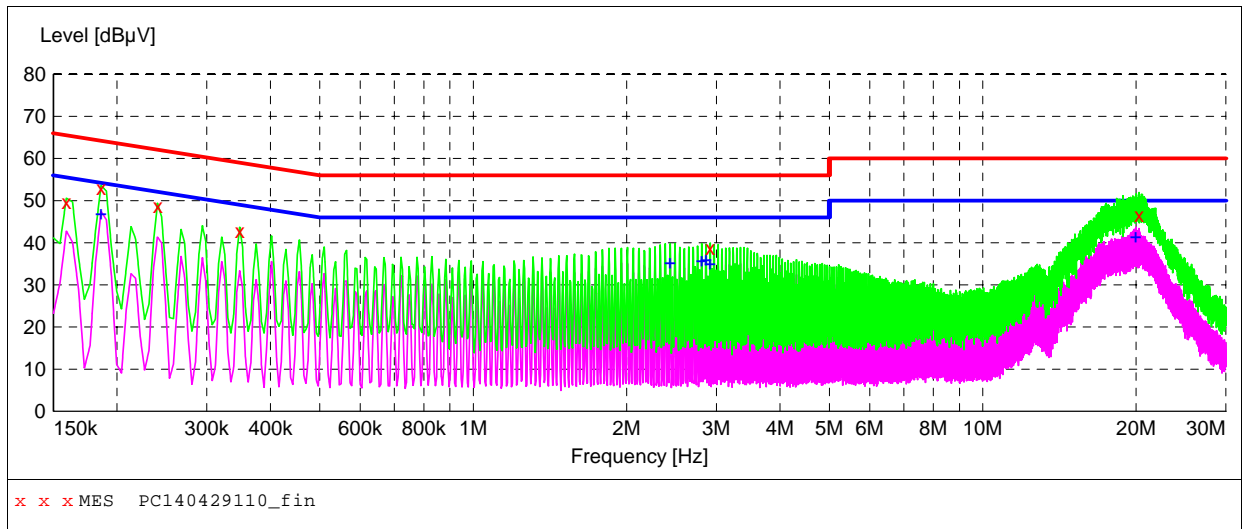

**MEASUREMENT RESULT: "PC140429110\_fin"**

4/29/2014 5:57PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.159000	49.60	20.1	66	15.9	QP	N	GND
0.186000	52.90	20.1	64	11.3	QP	N	GND
0.240000	48.80	20.1	62	13.3	QP	N	GND
0.348000	42.70	20.1	59	16.3	QP	N	GND
2.917000	38.70	20.4	56	17.3	QP	N	GND
20.278000	46.60	20.8	60	13.4	QP	N	GND

**MEASUREMENT RESULT: "PC140429110\_fin2"**

4/29/2014 5:57PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.186000	47.10	20.1	54	7.1	AV	N	GND
2.435500	35.40	20.3	46	10.6	AV	N	GND
2.809000	35.80	20.4	46	10.2	AV	N	GND
2.863000	36.00	20.4	46	10.0	AV	N	GND
2.917000	35.10	20.4	46	10.9	AV	N	GND
19.990000	41.50	20.8	50	8.5	AV	N	GND