


**Anbotek Compliance Laboratory Limited**

**Voltage Mains FCC PART 15 CLASS B**

EUT: XXXX N/M:XXXX  
 Manufacturer: XXXX  
 Operating Condition: FULL LOAD  
 Test Site: 1# Shielded Room  
 Operator: Bevan Zhang  
 Test Specification: AC 110V/60Hz  
 Comment: L  
 Temp.=22.2 Hum.=55%

**SCAN TABLE: "Voltage(150K~30M)FIN"**

Short Description: 150K-30M Disturbance Voltages

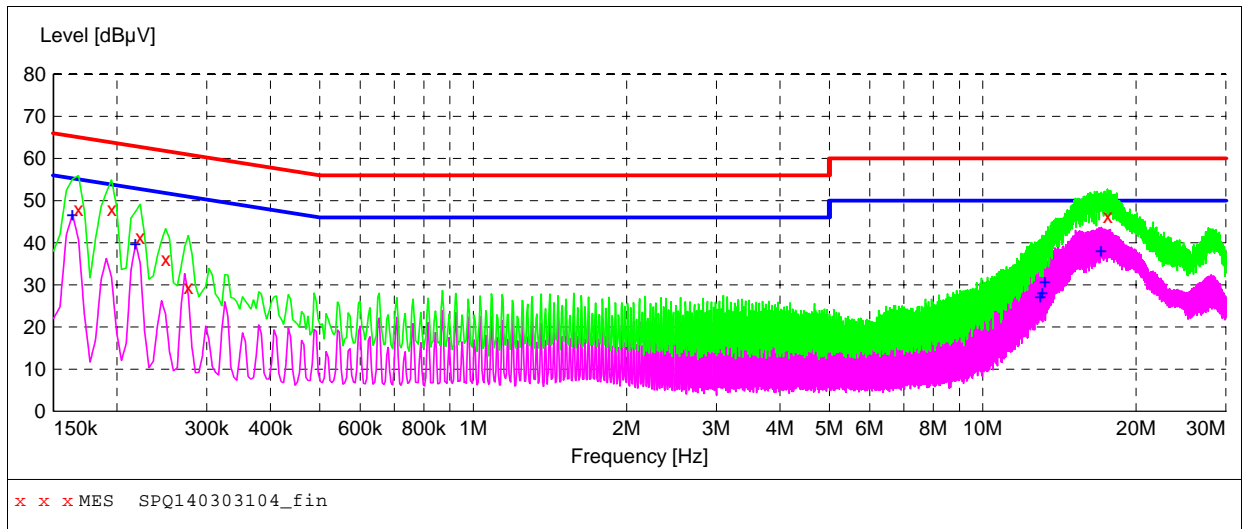

**MEASUREMENT RESULT: "SPQ140303104\_fin"**

3/3/2014 10:45AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.168000	47.90	20.1	65	17.2	QP	L1	GND
0.195000	47.90	20.1	64	15.9	QP	L1	GND
0.222000	41.40	20.1	63	21.3	QP	L1	GND
0.249000	36.10	20.1	62	25.7	QP	L1	GND
0.276000	29.50	20.1	61	31.4	QP	L1	GND
17.578000	46.40	20.8	60	13.6	QP	L1	GND

**MEASUREMENT RESULT: "SPQ140303104\_fin2"**

3/3/2014 10:45AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.163500	46.70	20.1	55	8.6	AV	L1	GND
0.217500	40.00	20.1	53	12.9	AV	L1	GND
12.983500	27.20	20.7	50	22.8	AV	L1	GND
13.091500	28.30	20.7	50	21.7	AV	L1	GND
13.253500	30.90	20.7	50	19.1	AV	L1	GND
17.083000	38.20	20.7	50	11.8	AV	L1	GND