


**Anbotek Compliance Laboratory Limited**

**Voltage Mains FCC PART 15 CLASS B**

EUT: XXXX N/M:XXXX  
 Manufacturer: XXXX  
 Operating Condition: FULL LOAD  
 Test Site: 1# Shielded Room  
 Operator: Bevan Zhang  
 Test Specification: AC 110V/60Hz  
 Comment: N  
 Temp.=22.2 Hum.=55%

**SCAN TABLE: "Voltage(150K~30M)FIN"**

Short Description: 150K-30M Disturbance Voltages

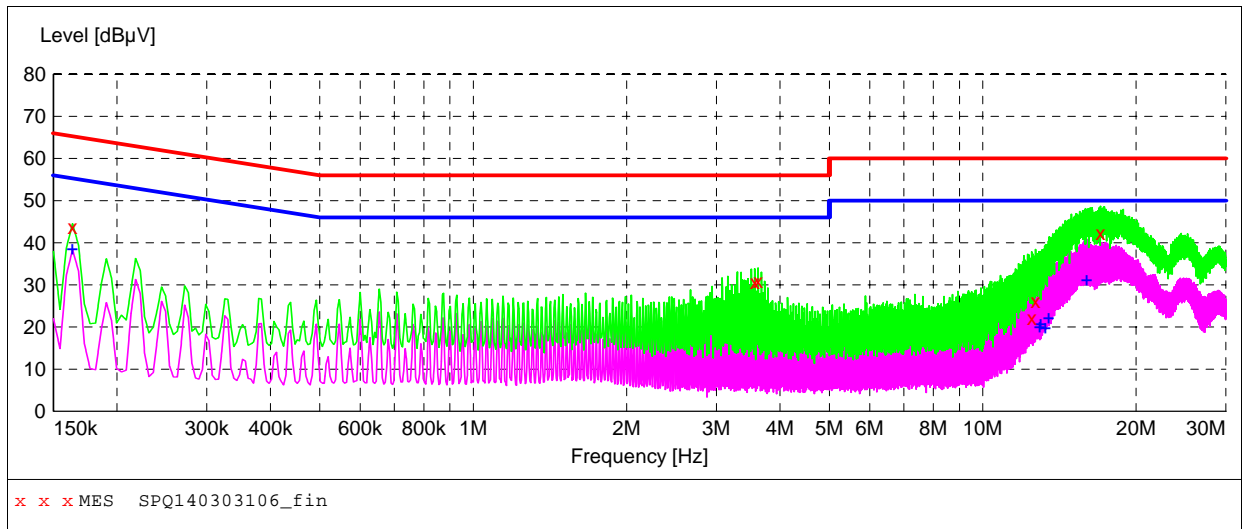

**MEASUREMENT RESULT: "SPQ140303106\_fin"**

3/3/2014 10:51AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.163500	43.70	20.1	65	21.6	QP	N	GND
3.569500	30.50	20.4	56	25.5	QP	N	GND
3.623500	31.00	20.4	56	25.0	QP	N	GND
12.479500	22.00	20.7	60	38.0	QP	N	GND
12.695500	26.10	20.7	60	33.9	QP	N	GND
17.020000	42.30	20.7	60	17.7	QP	N	GND

**MEASUREMENT RESULT: "SPQ140303106\_fin2"**

3/3/2014 10:51AM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.163500	38.70	20.1	55	16.6	AV	N	GND
12.938500	20.20	20.7	50	29.8	AV	N	GND
12.992500	20.80	20.7	50	29.2	AV	N	GND
13.267000	19.90	20.7	50	30.1	AV	N	GND
13.483000	22.40	20.7	50	27.6	AV	N	GND
15.989500	31.40	20.7	50	18.6	AV	N	GND