


**Anbotek Compliance Laboratory Limited**

**Voltage Mains FCC PART 15 B**

EUT: XXXX M/N:24V 16.6A 4#  
 Manufacturer: XXXX  
 Operating Condition: FULL LOAD  
 Test Site: 1# Shielded Room  
 Operator: Allen Peng  
 Test Specification: AC 110V/60HZ  
 Comment: L  
 Temp.=22.2 Hum.=55%

**SCAN TABLE: "Voltage(150K~30M)FIN"**

Short Description: 150K-30M Disturbance Voltages

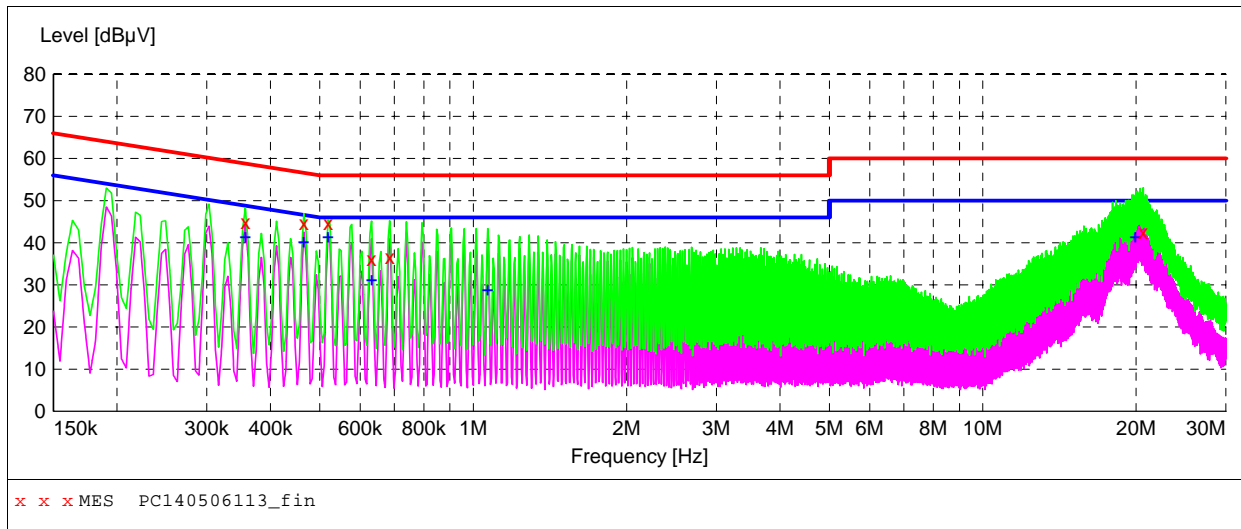

**MEASUREMENT RESULT: "PC140506113\_fin"**

5/6/2014 5:06PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.357000	44.90	20.1	59	13.9	QP	L1	GND
0.465000	44.80	20.1	57	11.8	QP	L1	GND
0.519000	44.60	20.1	56	11.4	QP	L1	GND
0.631500	36.10	20.1	56	19.9	QP	L1	GND
0.685500	36.50	20.1	56	19.5	QP	L1	GND
20.647000	42.40	20.8	60	17.6	QP	L1	GND

**MEASUREMENT RESULT: "PC140506113\_fin2"**

5/6/2014 5:06PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.357000	41.60	20.1	49	7.2	AV	L1	GND
0.465000	40.30	20.1	47	6.3	AV	L1	GND
0.519000	41.60	20.1	46	4.4	AV	L1	GND
0.631500	31.30	20.1	46	14.7	AV	L1	GND
1.067500	28.90	20.2	46	17.1	AV	L1	GND
19.940500	41.60	20.8	50	8.4	AV	L1	GND