


**Anbotek Compliance Laboratory Limited**

**Voltage Mains FCC PART 15 B**

EUT: XXXX M/N:24V 16.6A 4#  
 Manufacturer: XXXX  
 Operating Condition: FULL LOAD  
 Test Site: 1# Shielded Room  
 Operator: Allen Peng  
 Test Specification: AC 110V/60HZ  
 Comment: N  
 Temp.=22.2 Hum.=55%

**SCAN TABLE: "Voltage(150K~30M)FIN"**

Short Description: 150K-30M Disturbance Voltages

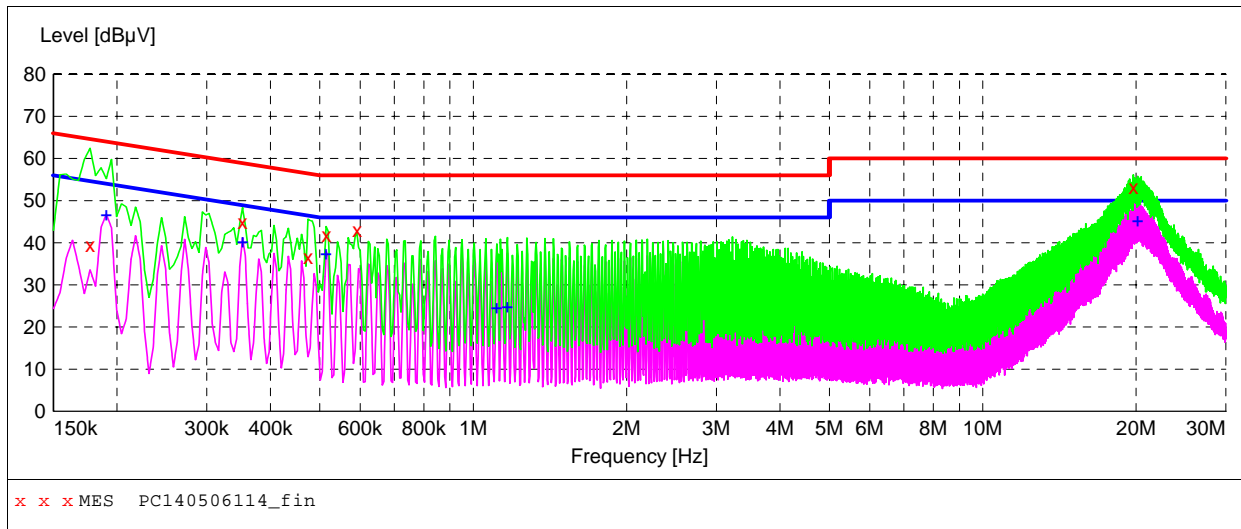

**MEASUREMENT RESULT: "PC140506114\_fin"**

5/6/2014 5:08PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.177000	39.50	20.1	65	25.1	QP	N	GND
0.352500	44.90	20.1	59	14.0	QP	N	GND
0.474000	36.60	20.1	56	19.8	QP	N	GND
0.514500	41.80	20.1	56	14.2	QP	N	GND
0.591000	43.10	20.1	56	12.9	QP	N	GND
19.756000	53.10	20.8	60	6.9	QP	N	GND

**MEASUREMENT RESULT: "PC140506114\_fin2"**

5/6/2014 5:08PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.190500	46.90	20.1	54	7.1	AV	N	GND
0.352500	40.40	20.1	49	8.5	AV	N	GND
0.514500	37.60	20.1	46	8.4	AV	N	GND
1.112500	24.80	20.2	46	21.2	AV	N	GND
1.166500	24.90	20.2	46	21.1	AV	N	GND
20.138500	45.40	20.8	50	4.6	AV	N	GND