


Job No.: File :鹏楚实业
Standard: (RE)FCC PART 15 class B 3m
Test item: Radiation Test
Temp.(C)/Hum.(%) 24.3 / 55 %
EUT: POWER
Mode: FULL LOAD
Model:

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 14/04/10/
Time: 15/11/09
Engineer Signature:
Distance: 3m

Note:

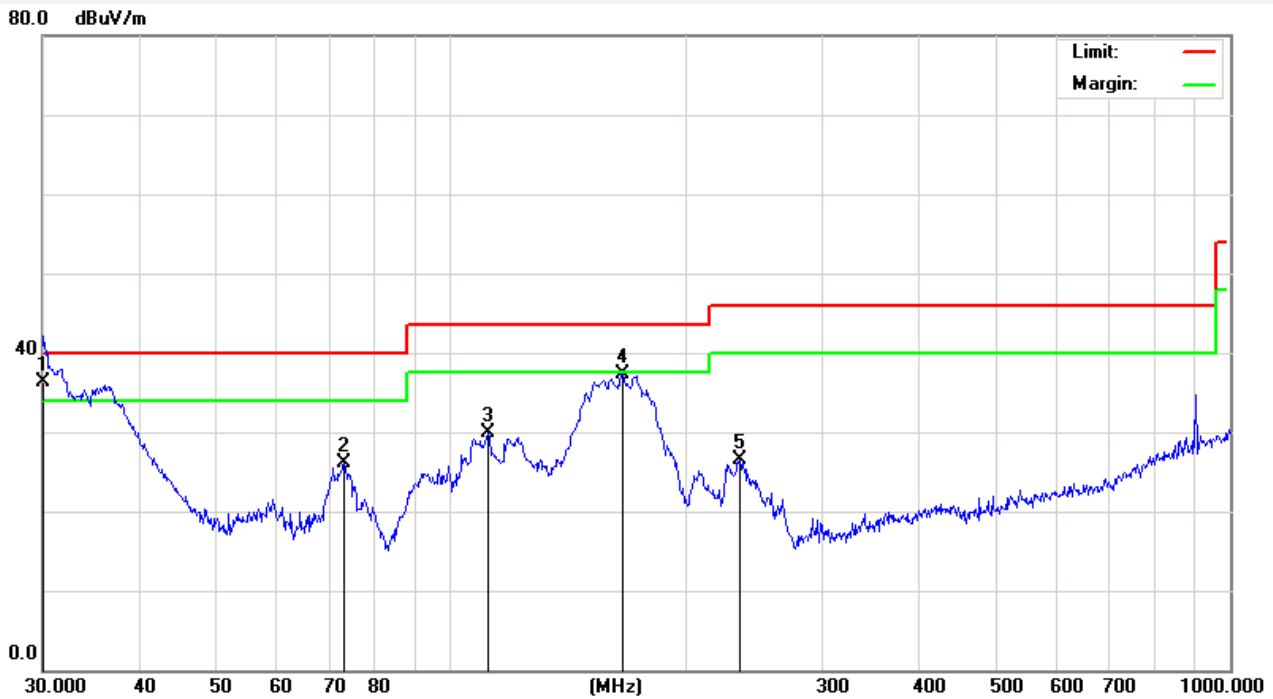


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	30.0000	53.28	-16.95	36.33	40.00	-3.67	QP	100	0	
2	73.1025	46.25	-20.23	26.02	40.00	-13.98	peak			
3	111.7380	45.57	-15.74	29.83	43.50	-13.67	peak			
4	166.0680	55.05	-17.68	37.37	43.50	-6.13	peak			
5	234.9909	40.82	-14.35	26.47	46.00	-19.53	peak			

Job No.: File :鹏楚实业
Standard: (RE)FCC PART 15 class B 3m
Test item: Radiation Test
Temp.(C)/Hum.(%) 24.3 / 55 %
EUT: POWER
Mode: FULL LOAD
Model:

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 14/04/10/
Time: 15/14/01
Engineer Signature:
Distance: 3m

Note:

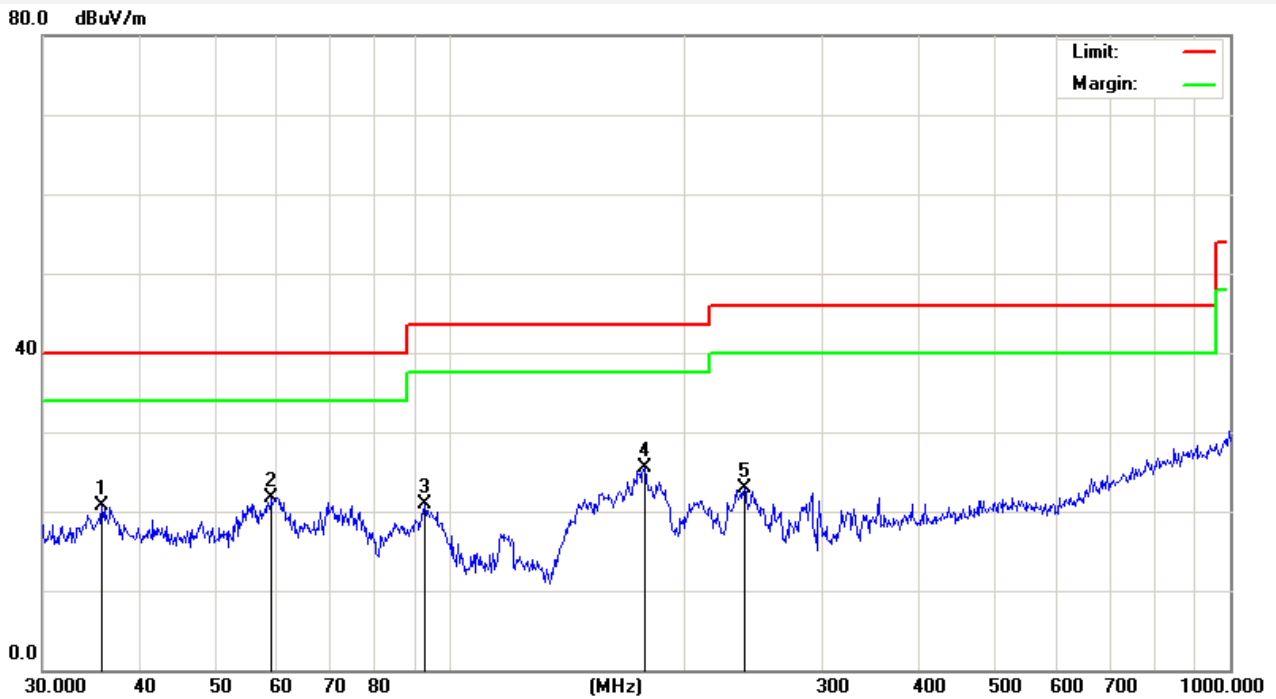


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	35.7490	36.68	-16.00	20.68	40.00	-19.32	peak			
2	59.0251	37.08	-15.31	21.77	40.00	-18.23	peak			
3	92.7871	42.65	-21.84	20.81	43.50	-22.69	peak			
4	177.5092	47.46	-22.03	25.43	43.50	-18.07	peak			
5	238.3102	41.13	-18.26	22.87	46.00	-23.13	peak			

Job No.: File :鹏楚实业
Standard: (RE)EN55022_class B_3m
Test item: Radiation Test
Temp.(C)/Hum.(%) 24.3 / 55 %
EUT: POWER
Mode: FULL LOAD
Model:

Polarization: Vertical
Power Source: AC 230V/50Hz
Date: 14/04/10/
Time: 15/16/34
Engineer Signature:
Distance: 3m

Note:

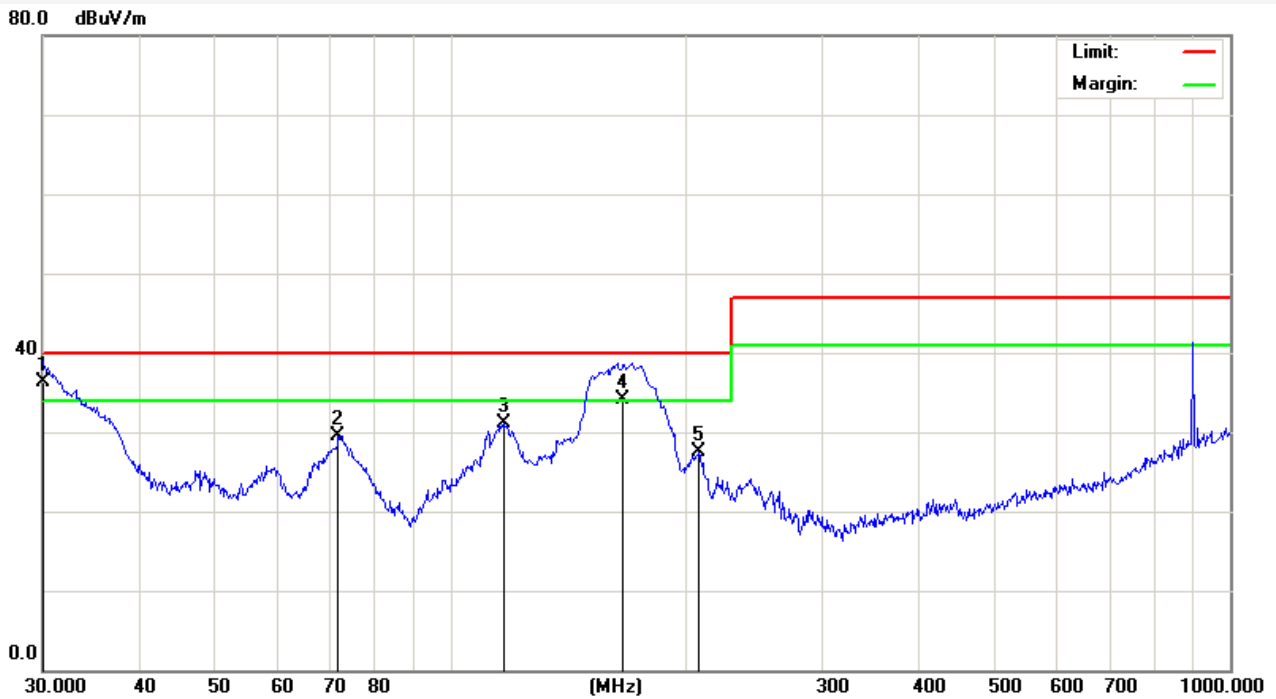


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	30.0100	53.24	-16.95	36.29	40.00	-3.71	QP	100	0	
2	71.8320	49.54	-19.98	29.56	40.00	-10.44	peak			
3	117.3603	47.18	-16.14	31.04	40.00	-8.96	peak			
4	166.3550	51.79	-17.67	34.12	40.00	-5.88	QP	100	360	
5	208.5803	43.09	-15.55	27.54	40.00	-12.46	peak			

Job No.: File :鹏楚实业
Standard: (RE)EN55022_class B_3m
Test item: Radiation Test
Temp.(C)/Hum.(%) 24.3 / 55 %
EUT: POWER
Mode: FULL LOAD
Model:

Polarization: Horizontal
Power Source: AC 230V/50Hz
Date: 14/04/10/
Time: 15/21/35
Engineer Signature:
Distance: 3m

Note:

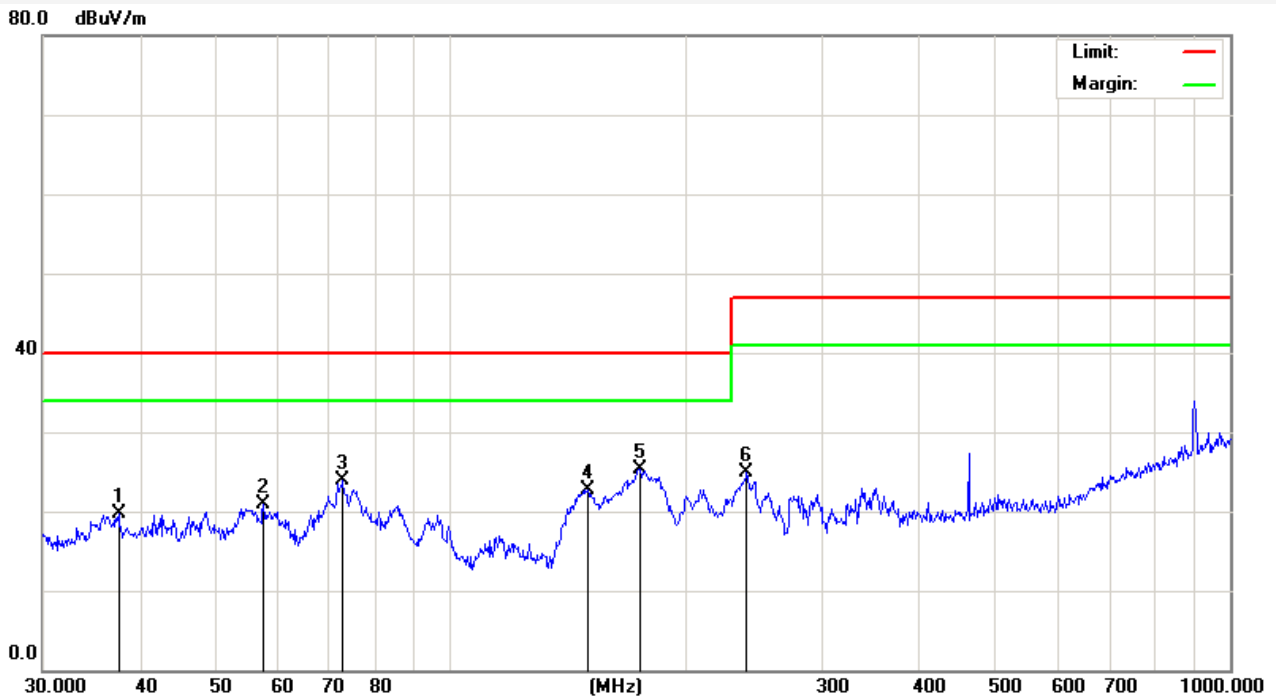

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	37.5479	34.99	-15.31	19.68	40.00	-20.32	peak			
2	57.5939	36.06	-15.17	20.89	40.00	-19.11	peak			
3	72.8466	44.09	-20.17	23.92	40.00	-16.08	peak			
4	150.0108	46.08	-23.34	22.74	40.00	-17.26	peak			
5	175.0368	47.57	-22.20	25.37	40.00	-14.63	peak			
6	239.9874	43.00	-18.09	24.91	47.00	-22.09	peak			