


Anbotek Compliance Laboratory Limited

Voltage Mains FCC PART 15 B

EUT: XXXX M/N:24V 16.6A 5#
 Manufacturer: XXXX
 Operating Condition: FULL LOAD
 Test Site: 1# Shielded Room
 Operator: Allen Peng
 Test Specification: AC 110V/60HZ
 Comment: L
 Temp.=22.2 Hum.=55%

SCAN TABLE: "Voltage(150K~30M)FIN"

Short Description: 150K-30M Disturbance Voltages

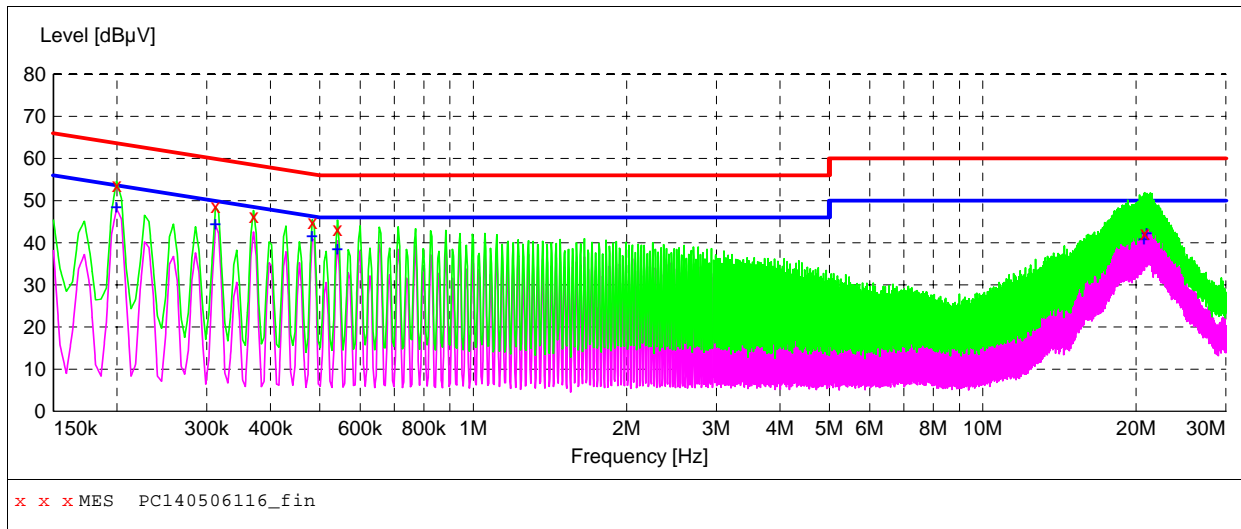

MEASUREMENT RESULT: "PC140506116_fin"

5/6/2014 5:16PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.199500	53.70	20.1	64	9.9	QP	L1	GND
0.312000	48.70	20.1	60	11.2	QP	L1	GND
0.370500	46.30	20.1	59	12.2	QP	L1	GND
0.483000	44.90	20.1	56	11.4	QP	L1	GND
0.541500	43.20	20.1	56	12.8	QP	L1	GND
20.791000	42.30	20.8	60	17.7	QP	L1	GND

MEASUREMENT RESULT: "PC140506116_fin2"

5/6/2014 5:16PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.199500	48.70	20.1	54	4.9	AV	L1	GND
0.312000	44.70	20.1	50	5.2	AV	L1	GND
0.483000	41.70	20.1	46	4.6	AV	L1	GND
0.541500	38.80	20.1	46	7.2	AV	L1	GND
20.737000	41.10	20.8	50	8.9	AV	L1	GND
20.966500	42.40	20.8	50	7.6	AV	L1	GND