


Anbotek Compliance Laboratory Limited

Voltage Mains FCC PART 15 B

EUT: XXXX M/N:24V 16.6A 5#
 Manufacturer: XXXX
 Operating Condition: FULL LOAD
 Test Site: 1# Shielded Room
 Operator: Allen Peng
 Test Specification: AC 110V/60HZ
 Comment: N
 Temp.=22.2 Hum.=55%

SCAN TABLE: "Voltage(150K~30M)FIN"

Short Description: 150K-30M Disturbance Voltages

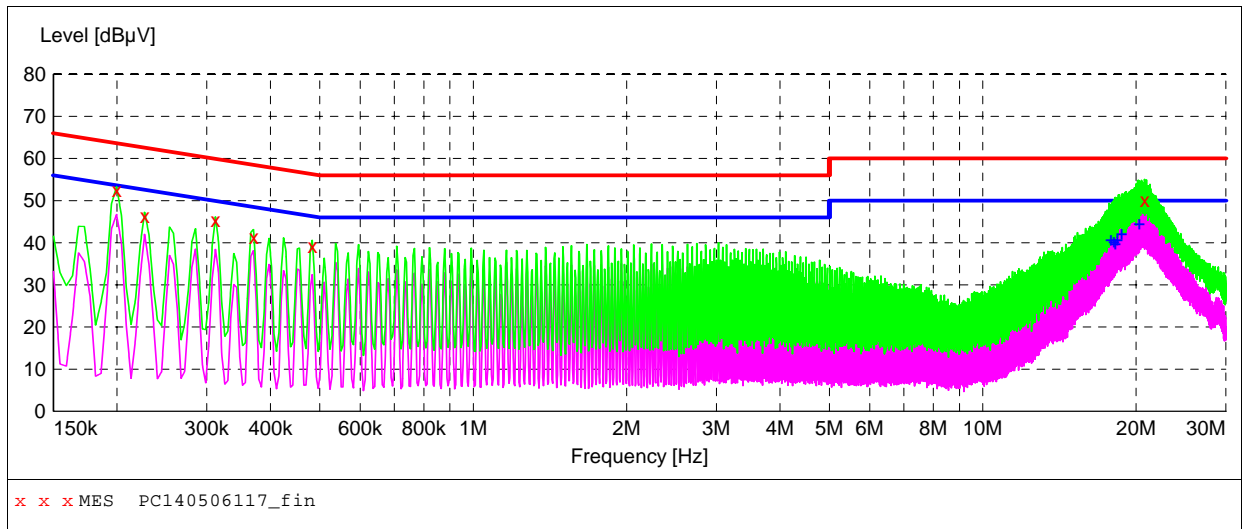

MEASUREMENT RESULT: "PC140506117_fin"

5/6/2014 5:18PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.199500	52.40	20.1	64	11.2	QP	N	GND
0.226500	46.40	20.1	63	16.2	QP	N	GND
0.312000	45.30	20.1	60	14.6	QP	N	GND
0.370500	41.40	20.1	59	17.1	QP	N	GND
0.483000	39.20	20.1	56	17.1	QP	N	GND
20.782000	50.10	20.8	60	9.9	QP	N	GND

MEASUREMENT RESULT: "PC140506117_fin2"

5/6/2014 5:18PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
17.870500	40.80	20.8	50	9.2	AV	N	GND
18.095500	40.30	20.8	50	9.7	AV	N	GND
18.208000	40.00	20.8	50	10.0	AV	N	GND
18.379000	40.90	20.8	50	9.1	AV	N	GND
18.748000	42.20	20.8	50	7.8	AV	N	GND
20.305000	44.80	20.8	50	5.2	AV	N	GND