


Job No.: File :鹏楚实业
Standard: (RE)FCC PART 15 class B 3m
Test item: Radiation Test
Temp.(C)/Hum.(%) 24.3 / 55 %
EUT: POWER
Mode: FULL LOAD
Model: 24V 16.6A

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 2014/05/06
Time: 17:51:41
Engineer Signature:
Distance: 3m

Note: 3#

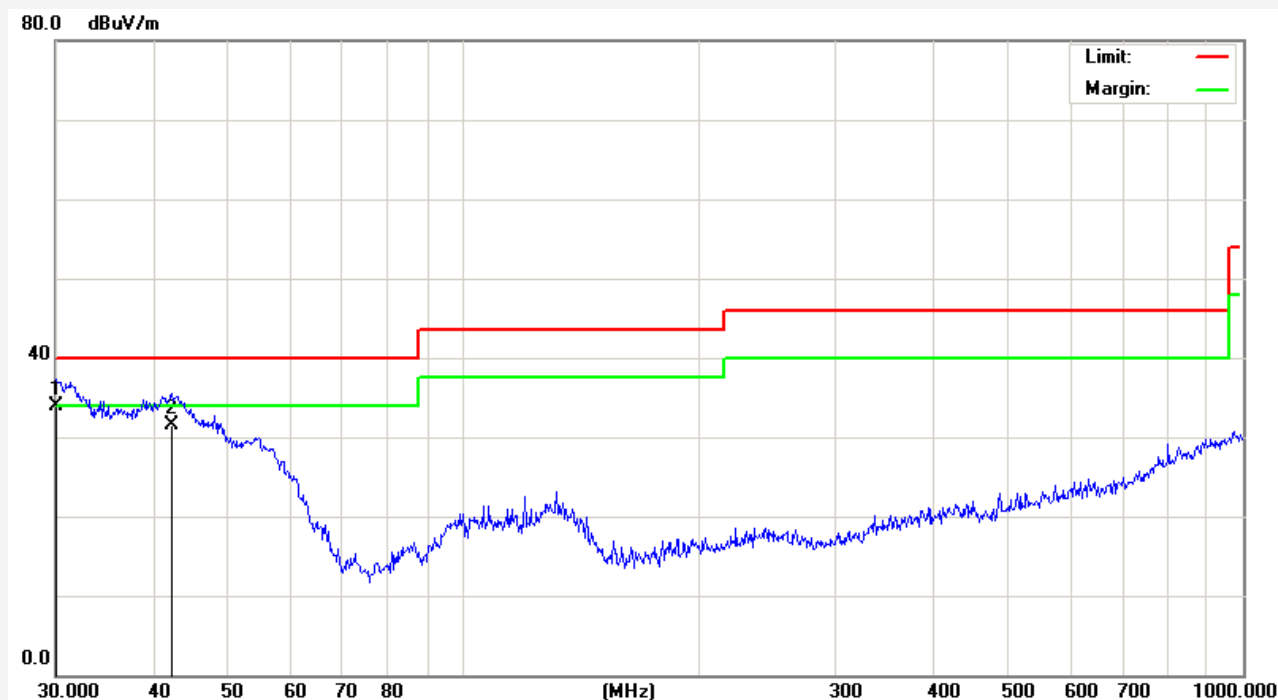


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	30.1054	50.87	-16.94	33.93	40.00	-6.07	QP	100	0	
2	42.3022	45.81	-14.35	31.46	40.00	-8.54	QP	100	0	

Job No.: File :鹏楚实业
Standard: (RE)FCC PART 15 class B 3m
Test item: Radiation Test
Temp.(C)/Hum.(%) 24.3 / 55 %
EUT: POWER
Mode: FULL LOAD
Model: 24V 16.6A

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 2014/05/06
Time: 17:56:53
Engineer Signature:
Distance: 3m

Note: 3#

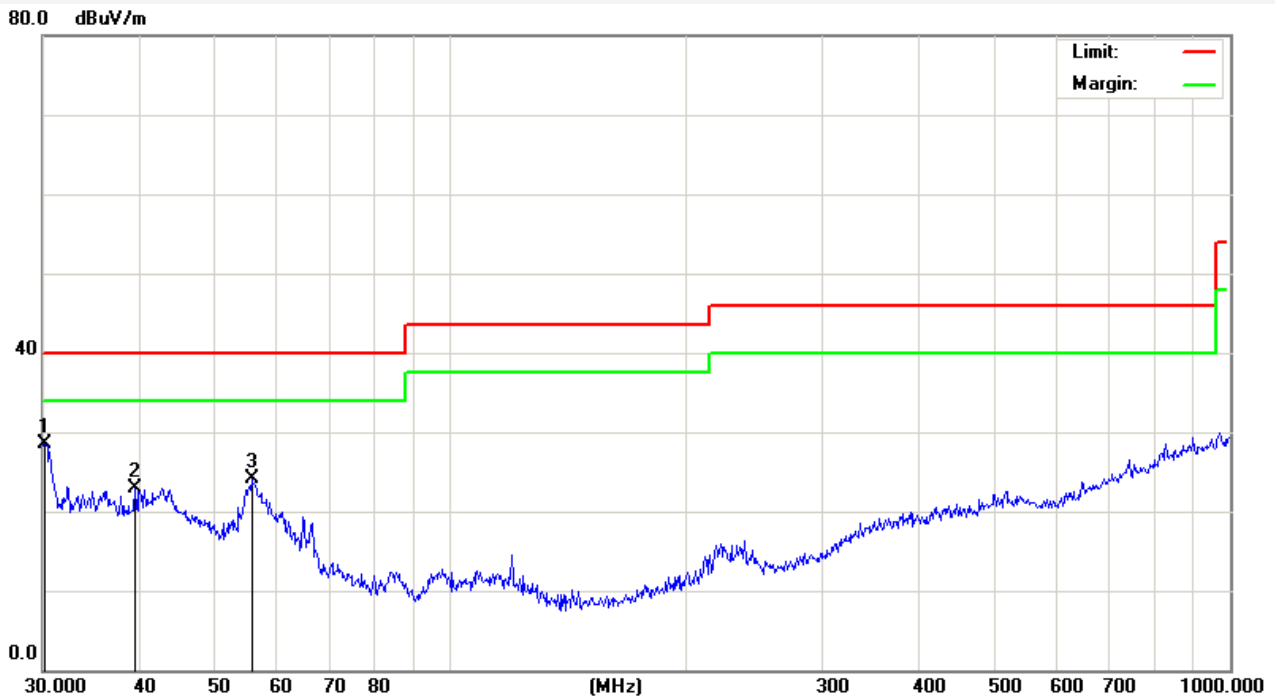

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	30.2111	45.43	-16.92	28.51	40.00	-11.49	peak			
2	39.4371	37.52	-14.58	22.94	40.00	-17.06	peak			
3	55.6094	39.01	-14.99	24.02	40.00	-15.98	peak			