


**Anbotek Compliance Laboratory Limited**

**Voltage Mains FCC PART 15 B**

EUT: XXXX M/N:24V 16.6A 6#  
 Manufacturer: XXXX  
 Operating Condition: FULL LOAD  
 Test Site: 1# Shielded Room  
 Operator: Allen Peng  
 Test Specification: AC 110V/60HZ  
 Comment: L  
 Temp.=22.2 Hum.=55%

**SCAN TABLE: "Voltage(150K~30M)FIN"**

Short Description: 150K-30M Disturbance Voltages

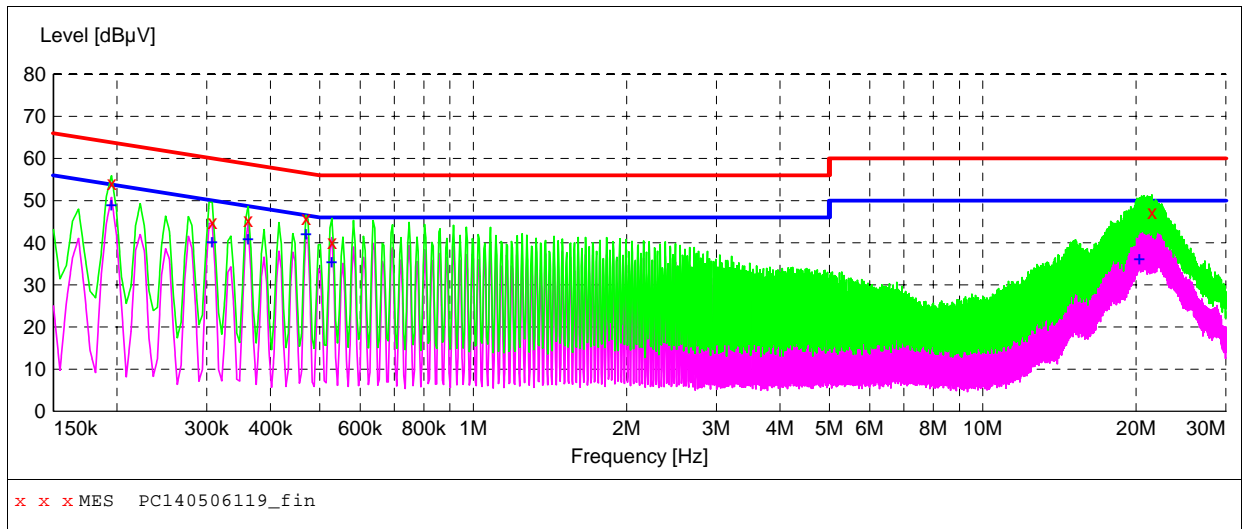

**MEASUREMENT RESULT: "PC140506119\_fin"**

5/6/2014 5:24PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.195000	54.20	20.1	64	9.6	QP	L1	GND
0.307500	44.90	20.1	60	15.1	QP	L1	GND
0.361500	45.30	20.1	59	13.4	QP	L1	GND
0.469500	45.90	20.1	57	10.6	QP	L1	GND
0.528000	40.10	20.1	56	15.9	QP	L1	GND
21.475000	47.20	20.8	60	12.8	QP	L1	GND

**MEASUREMENT RESULT: "PC140506119\_fin2"**

5/6/2014 5:24PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.195000	49.20	20.1	54	4.6	AV	L1	GND
0.307500	40.30	20.1	50	9.7	AV	L1	GND
0.361500	41.20	20.1	49	7.5	AV	L1	GND
0.469500	42.20	20.1	47	4.3	AV	L1	GND
0.528000	35.70	20.1	46	10.3	AV	L1	GND
20.291500	36.30	20.8	50	13.7	AV	L1	GND