


Anbotek Compliance Laboratory Limited

Voltage Mains FCC PART 15 B

EUT: XXXX M/N:24V 16.6A 6#
 Manufacturer: XXXX
 Operating Condition: FULL LOAD
 Test Site: 1# Shielded Room
 Operator: Allen Peng
 Test Specification: AC 110V/60HZ
 Comment: N
 Temp.=22.2 Hum.=55%

SCAN TABLE: "Voltage(150K~30M)FIN"

Short Description: 150K-30M Disturbance Voltages

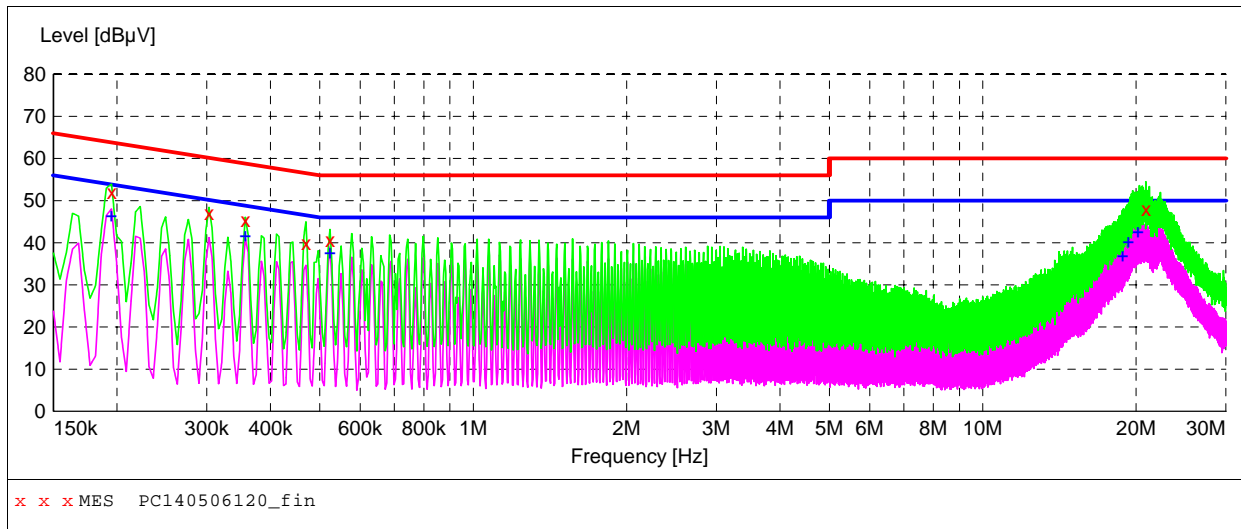

MEASUREMENT RESULT: "PC140506120_fin"

5/6/2014 5:27PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.195000	51.90	20.1	64	11.9	QP	N	GND
0.303000	47.00	20.1	60	13.2	QP	N	GND
0.357000	45.40	20.1	59	13.4	QP	N	GND
0.469500	39.90	20.1	57	16.6	QP	N	GND
0.523500	40.60	20.1	56	15.4	QP	N	GND
20.899000	47.90	20.8	60	12.1	QP	N	GND

MEASUREMENT RESULT: "PC140506120_fin2"

5/6/2014 5:27PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.195000	46.50	20.1	54	7.3	AV	N	GND
0.357000	41.70	20.1	49	7.1	AV	N	GND
0.523500	37.80	20.1	46	8.2	AV	N	GND
18.815500	37.10	20.8	50	12.9	AV	N	GND
19.310500	40.50	20.8	50	9.5	AV	N	GND
20.188000	42.80	20.8	50	7.2	AV	N	GND