

Notes:

1. Material: RoHS compliant 12AWG (0.08") Aluminum.
2. Break all sharp edges and mask all threads prior to powder coat.
3. Part is to be powder coated with Cardinal color C241-BK109.
Coating thickness must be between 0.05 and 0.12mm.
4. Mark in indicated area with company identifier.
5. Parts must be clean, free of oil and debris

Rev Date Description

Rev	Date	Description
K	2.13.18	Added note 5, hang point callouts
J	1.22.18	Added Masking for EINSY heatsink
I	11.9.17	Rev for Mini2
H	9.20.16	Dimension of masking modified for clarity



DRAWN BY: bam	DATE: 7.7.16
MATERIAL: See Notes	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. TOLERANCES ARE:	
DECIMALS .X±.75 .XX±.25 .XXX±.125 .XXXX±.050	ANGLES X°±1° 63
BREAK EDGES 0.1/0.5 FILLET RADIUS 0.1/0.5	




**ALEPH
OBJECTS**
INCORPORATED

626 West 66th Street
Loveland, Colorado 80538, USA
Phone +1-970-377-1111
www.alephobjects.com


TITLE Left side mini			
SIZE A	DWG NO. PP-FP0055	REV. K	
SCALE 1:3	DO NOT SCALE DRAWING	SHEET	1 of 4

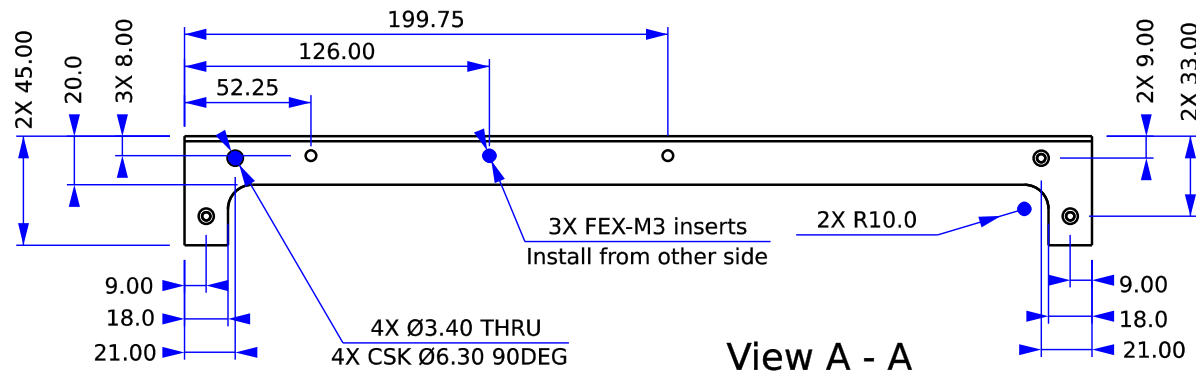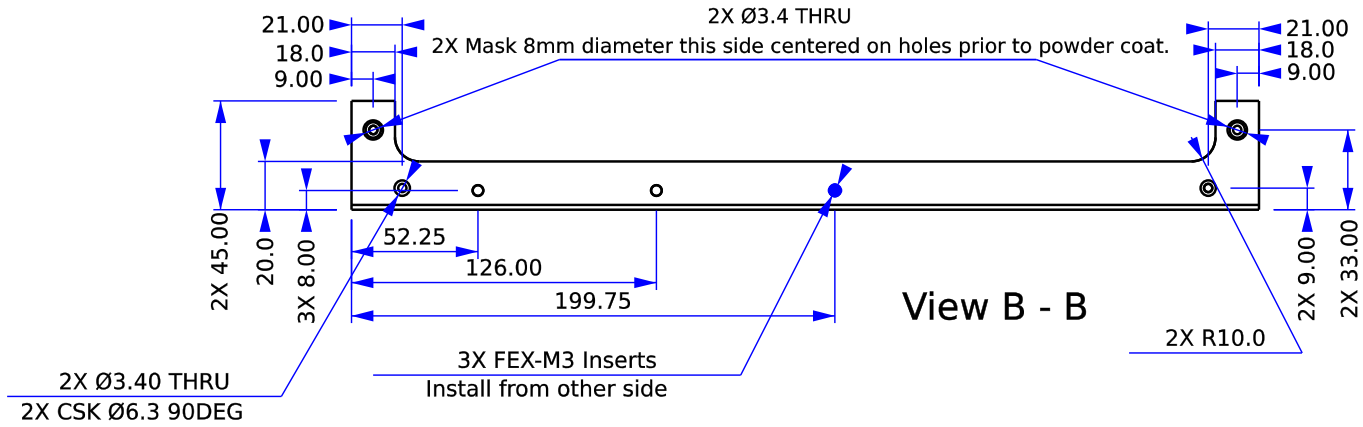

TITLE			
Left side mini			
SIZE	DWG NO.	REV.	
A	PP-FP0055	K	
SCALE	1:3	DO NOT SCALE DRAWING	SHEET 2 of 4

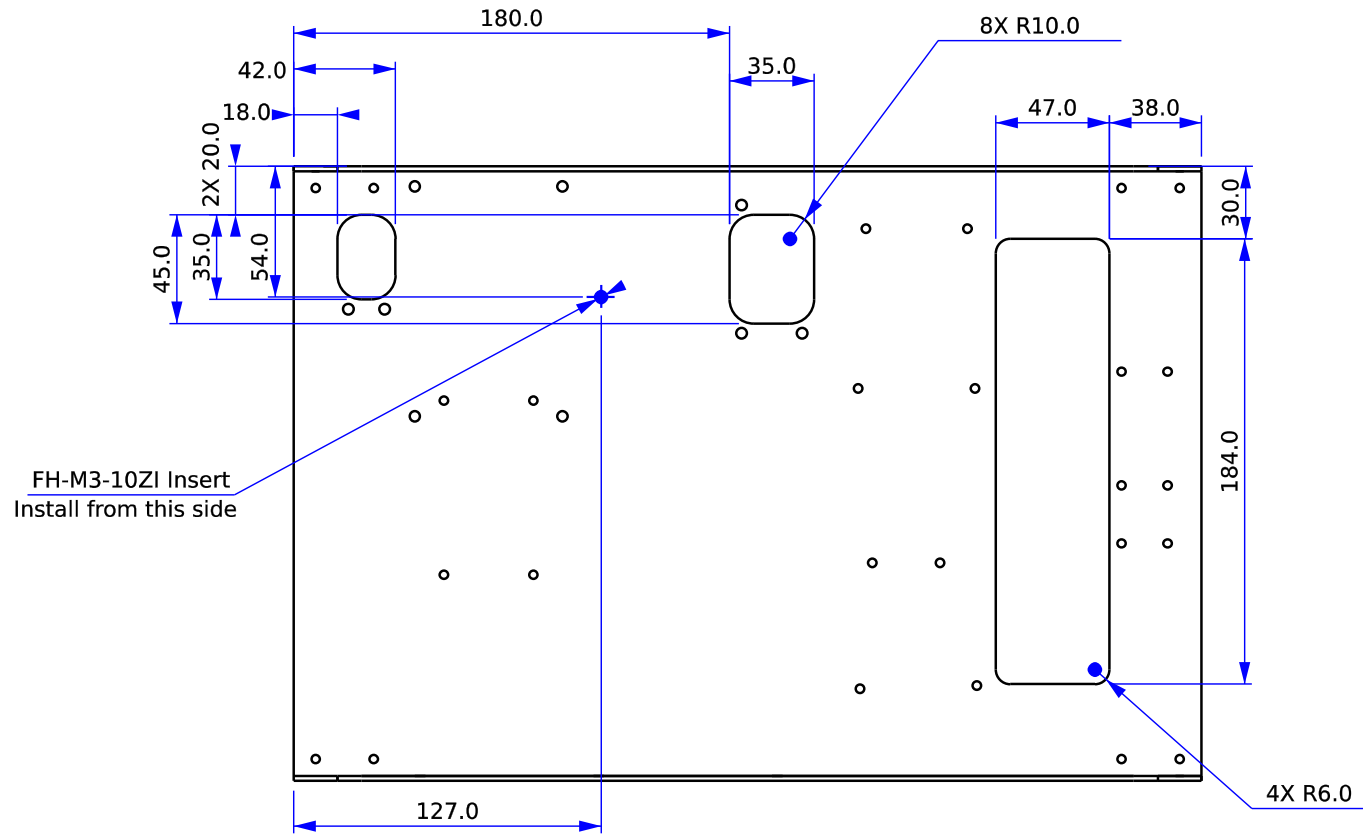

TITLE			
Left side mini			
SIZE	DWG NO.	REV.	
A	PP-FP0055	K	
SCALE	1:3	DO NOT SCALE DRAWING	SHEET 3 of 4

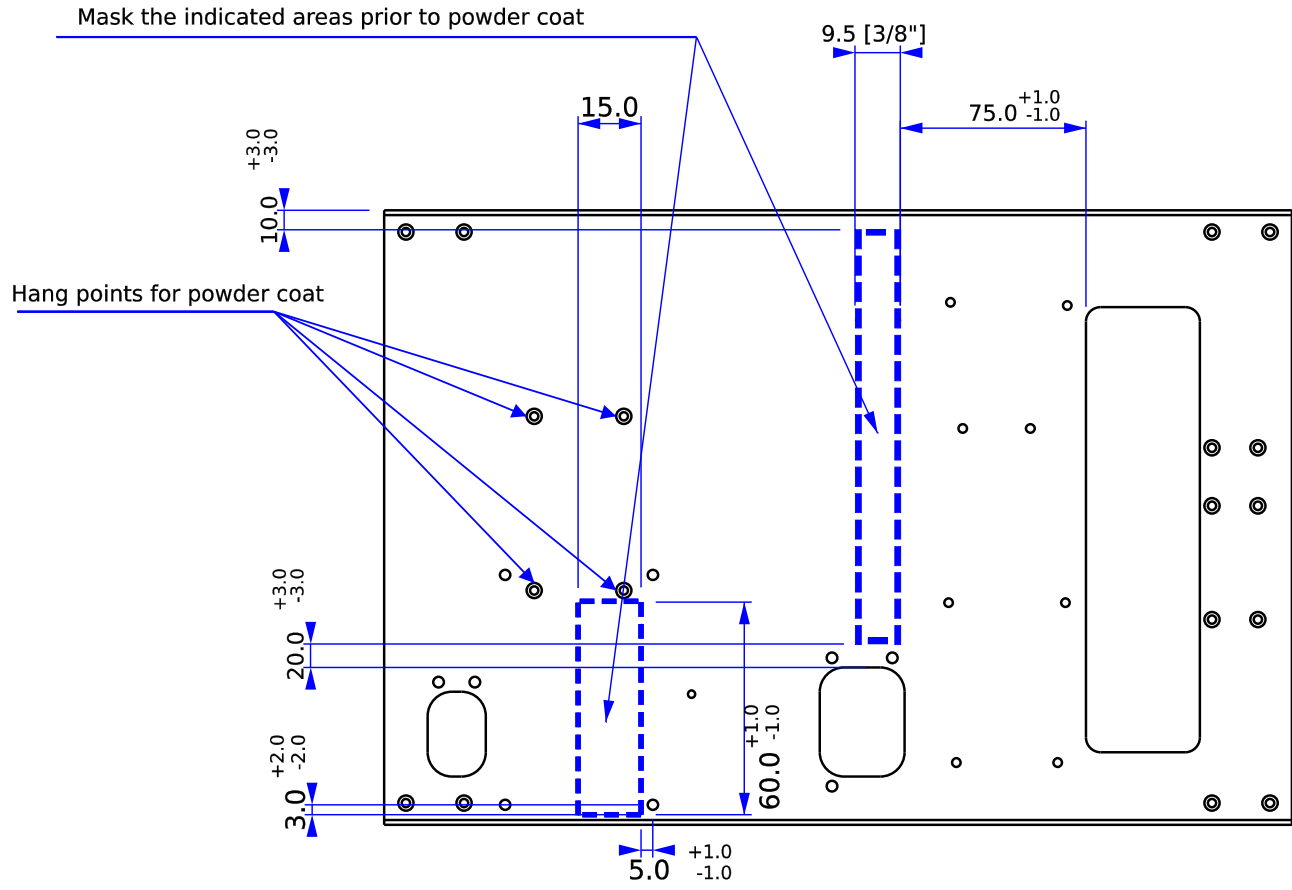

TITLE			
Left side mini			
SIZE	DWG NO.	REV.	
A	PP-FP0055	K	
SCALE	1:3	DO NOT SCALE DRAWING	SHEET 4 of 4