

Job No.: File :1

Standard: (RE)FCC PART 15 class B 3m

Test item: Radiation Test

Temp.( C)/Hum.(%) 24.3 / 55 %

EUT: 开关电源

Mode: FULL LOAD

Model: PC-2417000

Polarization: Vertical

Power Source: AC 110V/50Hz


Date: 14/03/03/

Time: 11/27/36

Engineer Signature:

Distance: 3m

Note: 1# 输出24V/17A

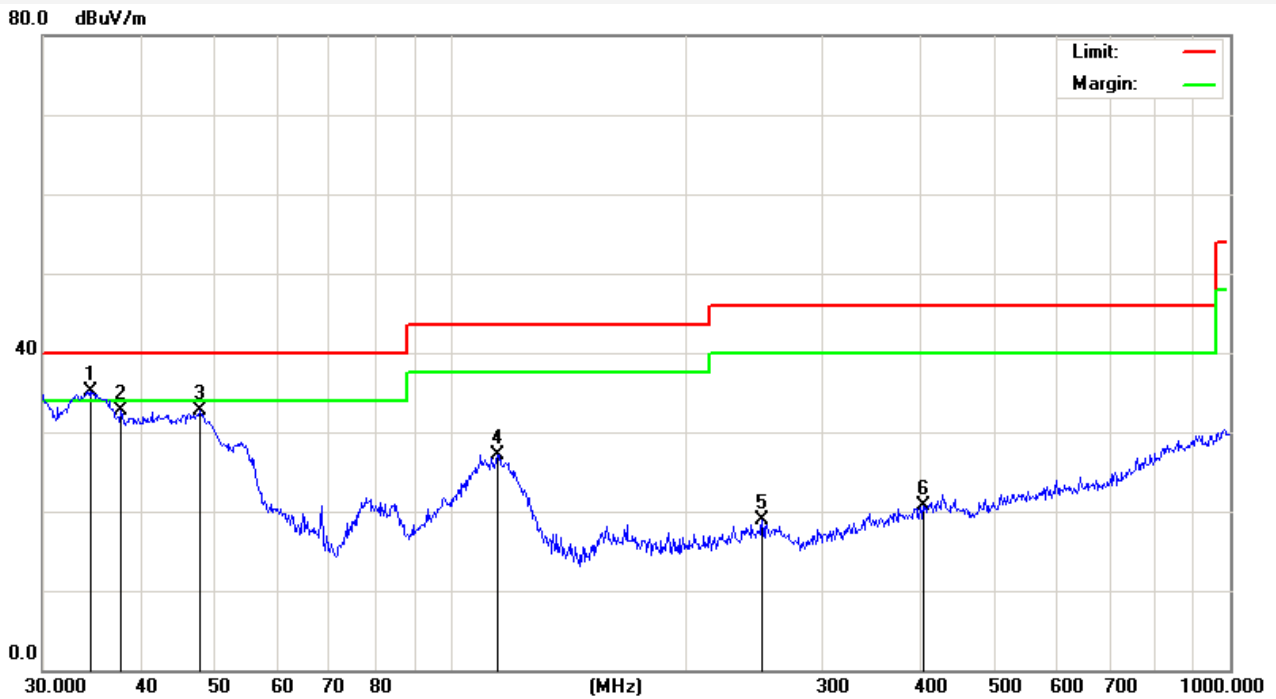


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	34.5173	51.42	-16.36	35.06	40.00	-4.94	peak			
2	37.8121	47.85	-15.21	32.64	40.00	-7.36	peak			
3	47.8260	47.08	-14.47	32.61	40.00	-7.39	peak			
4	114.9169	43.17	-15.97	27.20	43.50	-16.30	peak			
5	251.1804	32.88	-14.03	18.85	46.00	-27.15	peak			
6	404.6665	32.42	-11.74	20.68	46.00	-25.32	peak			

Job No.: File :1  
Standard: (RE)FCC PART 15 class B 3m  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 24.3 / 55 %  
EUT: 开关电源  
Mode: FULL LOAD  
Model: PC-2417000

Polarization: Horizontal  
Power Source: AC 110V/50Hz  
Date: 14/03/03/  
Time: 11/29/43  
Engineer Signature:  
Distance: 3m

Note: 1# 输出24V/17A

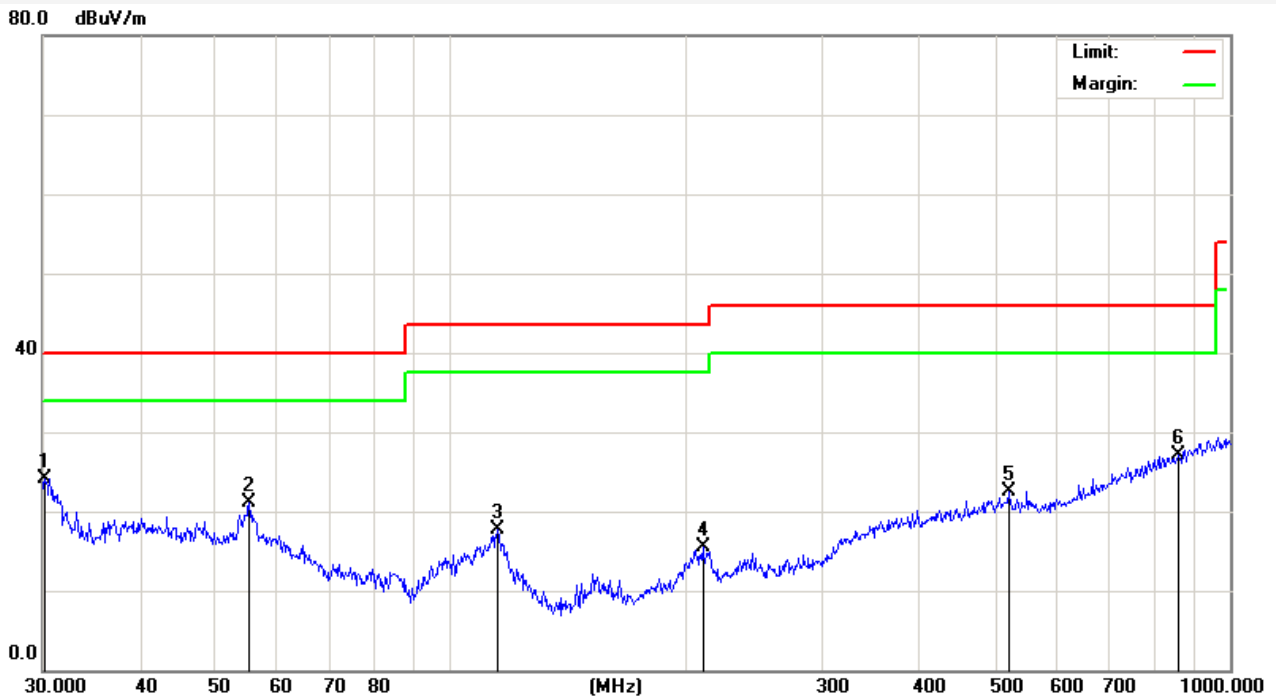


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	30.2111	41.09	-16.92	24.17	40.00	-15.83	peak			
2	55.2207	35.96	-14.94	21.02	40.00	-18.98	peak			
3	114.9169	38.60	-20.97	17.63	43.50	-25.87	peak			
4	210.7860	36.01	-20.46	15.55	43.50	-27.95	peak			
5	520.8882	33.45	-11.01	22.44	46.00	-23.56	peak			
6	860.0352	32.49	-5.42	27.07	46.00	-18.93	peak			

Job No.: File :1  
Standard: (RE)FCC PART 15 class B 3m  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 24.3 / 55 %  
EUT: 开关电源  
Mode: FULL LOAD  
Model: PC-2417000

Polarization: Vertical  
Power Source: AC 110V/50Hz  
Date: 14/03/03/  
Time: 11/32/54  
Engineer Signature:  
Distance: 3m

Note: 2# 输出24V/17A

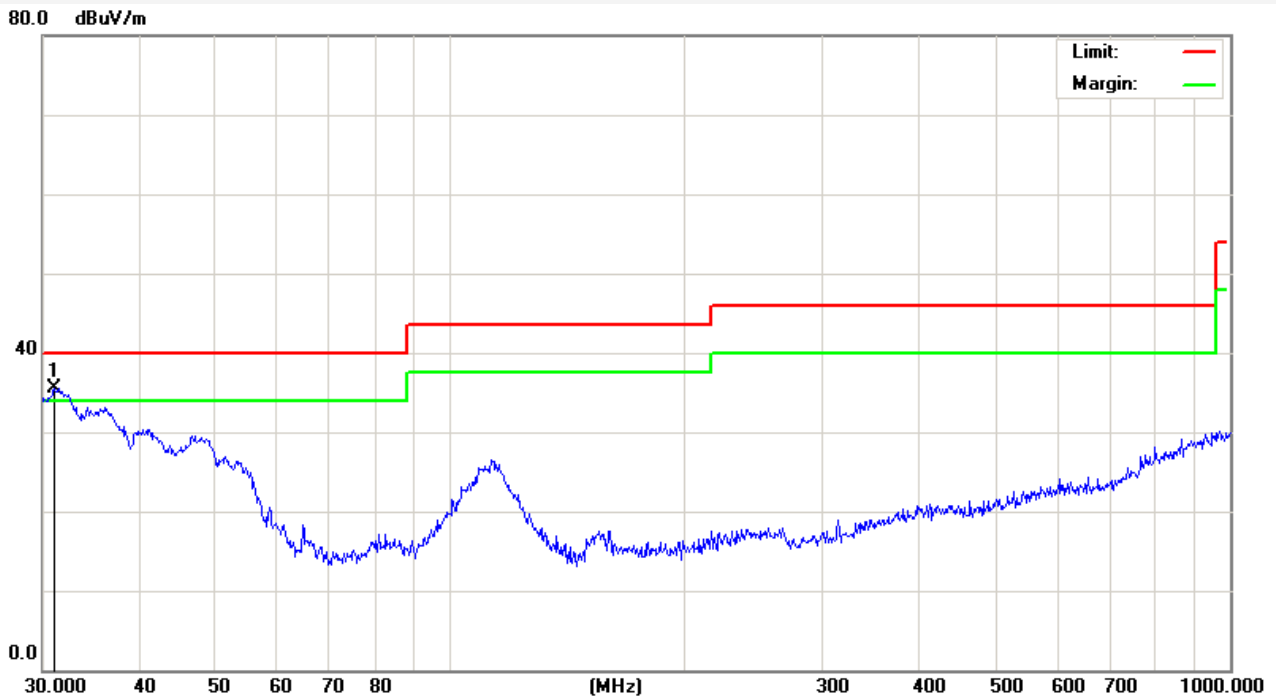


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	31.0706	52.31	-16.81	35.50	40.00	-4.50	peak			

Job No.: File :1  
Standard: (RE)FCC PART 15 class B 3m  
Test item: Radiation Test  
Temp.( C)/Hum.(%) 24.3 / 55 %  
EUT: 开关电源  
Mode: FULL LOAD  
Model: PC-2417000

Polarization: Horizontal  
Power Source: AC 110V/50Hz  
Date: 14/03/03/  
Time: 11/34/11  
Engineer Signature:  
Distance: 3m

Note: 2# 输出24V/17A

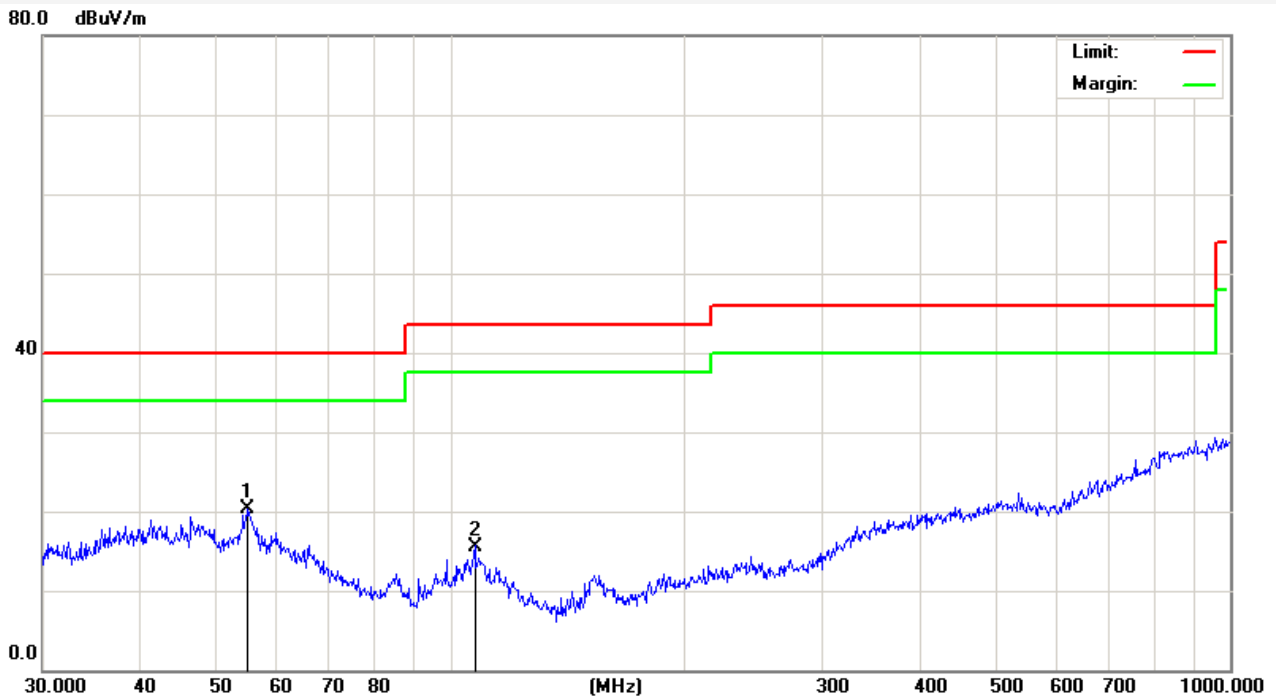

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	55.0274	35.20	-14.93	20.27	40.00	-19.73	peak			
2	107.5101	36.26	-20.66	15.60	43.50	-27.90	peak			