



Electro Magnetic Compatibility Test Report Regarding the CE Mark Compliance of the Aleph Objects

LulzBot Juniperberry – 3D Printer

(updated version of the Taz 5)

In Accordance with the Information Technology Standards

EN 55022:2010 for Emissions

And

EN 55024:2010 for Immunity

Report Revision History

Revision	Date	Reason
1.0	10 June 2015	Initial Release

Test Specification: EN 55022:2010 and EN 55024:2010

Prepared by EMI Test Lab - EmiTestLab.com

Model Name of EUT: LulzBot Juniperberry

Manufacturer: Aleph Objects Inc.

Revision 1.0

EMI Test Lab LLC

Electro Magnetic Interference Testing
EmiTestLab.com



Description of Equipment Under Test (EUT)

Test Item : LulzBot Juniperberry – 3D Printer
Manufacturer : Aleph Objects, Inc.
Receipt date : 12 May 2015

Manufacturer's information

Manufacturers
Representative : Chris Wagner – Electrical Engineer
Company : Aleph Objects, Inc.
Address : 626 West 66th Street
Loveland, Colorado 80538
U.S.A.
Website : <https://www.alephobjects.com/index.html>

Tests Performed at

Address : EMI Test Lab LLC
1822 Skyway Drive Unit J
Longmont, Colorado 80504
U.S.A.
Website : <http://www.emitestlab.com/>

Test Specifications : EN 55022:2010 and EN 55024:2010
Tests completed : 29 May 2015

Result of Testing : **The EUT is in Compliance with EN 55022:2010 and EN 55024:2010**

Senior EMC Engineer : Dennis King

Report written by : Dennis King – EMI Test Lab
Test Plan : Dennis King for Aleph Objects
Report date : 10 June 2015

These test results relate only to the specific unit that was tested. A periodic production audit to verify continued compliance is recommended.

Test Specification: EN 55022:2010 and EN 55024:2010 Prepared by EMI Test Lab - EMI Test Lab.com
Model Name of EUT: LulzBot Juniperberry
Manufacturer: Aleph Objects Inc. Revision 1.0



Table of Contents

1. General Test Information.....page 4

- 1.1. Applied Standards
- 1.2. Detailed description of test configuration, input and output ports
 - 1.2.1. Description of test configuration
 - 1.2.2. Description of input and output ports and power supply information
 - 1.2.3. Operating modes

2. Emissions.....page 9

- 2.1. AC Mains conducted emissions
- 2.2. Enclosure radiated emissions
 - 2.2.1. 30-1,000 MHz
 - 2.2.2. 1-6 GHz
- 2.3. Harmonic current emissions
- 2.4. Voltage fluctuations and flicker

3. Immunity.....page 28

- 3.1. Performance criteria
- 3.2. Enclosure tests
 - 3.2.1. Radio-frequency electromagnetic fields
 - 3.2.2. Electrostatic discharge
 - 3.2.3. RF common mode on signal and telecom ports
 - 3.2.4. Fast transients on signal and telecom ports
- 3.3. AC power port tests
 - 3.3.1. Radio-frequency immunity, common mode
 - 3.3.2. Surges
 - 3.3.3. Fast Transients, common mode
 - 3.3.4. Voltage Dips and Interruptions
 - 3.3.5. Power Frequency Magnetic Fields

4. Modificationspage 47

5. Test equipment.....page 50

6. Measurement Uncertainty.....page 52

7. Test Planpage 54

8. Conclusionpage 55



1 General

1.1 Applied Standards

The LulzBot JUNIPERBERRY 3D Printer was evaluated for emissions using EN 55022:2010 and for immunity using EN 55024:2010.

EN 55022:2010 is the European Union's version of the international CISPR standard CISPR 22:2008.

EN 55024:2010 is the European Union's version of the international CISPR standard CISPR 24:2010.

1.2 Detailed description of the test configuration, input and output ports

The 3D Printer was tested while printing a 3D "Rocktopuss". The printer was connected to a laptop through the usb port on the printer. The software was installed on the laptop by Aleph Objects and represents typical software currently used by the end user.

For all test configurations the equipment under test (EUT) is powered by European AC power: 230VAC/50Hz. All I/O cables are less than 3 meters.

LulzBot JUNIPERBERRY Software:



The default software for the LulzBot JUNIPERBERRY 3D printer is called Cura LulzBot Edition. Cura is a Free Software program that both prepares your files for printing (by converting your model into GCODE), and also allows you to control the operation of your LulzBot 3D printer. The revision used during the testing was 14.09.

Firmware loaded on the JUNIPERBERRY was Marlin 2015Q1



EMI Test Lab LLC

Electro Magnetic Interference Testing
EmiTestLab.com

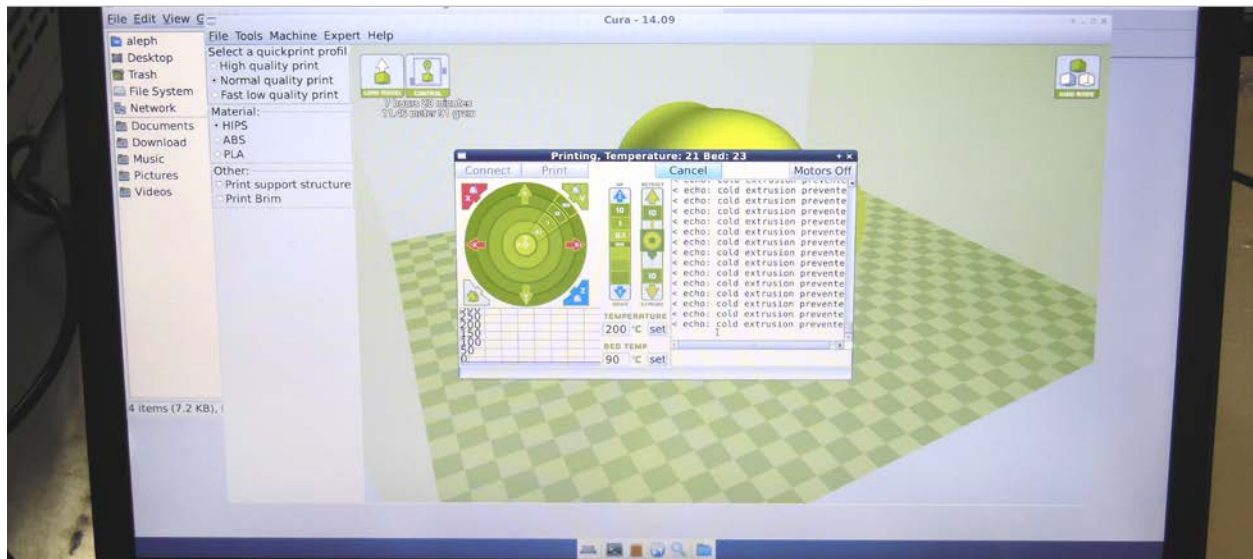

Typical screen shot of software used during emissions and immunity testing.

Test Specification: EN 55022:2010 and EN 55024:2010

Prepared by EMI Test Lab - EmiTestLab.com

Model Name of EUT: LulzBot Juniperberry

Manufacturer: Aleph Objects Inc.

Revision 1.0



1.2.1 Description of test configuration

EUT : LulzBot Juniperberry 3D Printer
 Manufacturer : Aleph Objects, Inc.
 System model name : Juniperberry
 Serial Number : KT-PR0036NA-0001
 Test Voltage : 230 VAC 50 Hz

1.2.2. Description of tested input and output ports and power supply information

Number of cable type	Type of Cable	From	To	Shielded?	Remarks - length
1	USB	Test Laptop	LulzBot TAZ5 - Juniperberry	Yes	Typical 6 ft. usb cable, no ferrites

Power supply location	Manufacturer	Model	Serial number	Shielded	Remarks
External AC supply	Mean Well in a housing designed by Aleph Objects	RSP-500-24	N/A	Yes, metal enclosure	CE mark – Output; 24V 21A Tested with Steward ferrite P/N 28A2029-0A0 to pass EFT, will be replaced in production with P/N 28B0672-000. According to data sheets, this part is as good or better than the part used during testing.



1.2.2 Operation modes

During preliminary testing for emissions it was determined that the following configurations are worst case for emissions and immunity. All further testing was done in these modes.


The system is operating in a typical mode as used by the end user.

The 3D Printer was tested while printing a 3D “Rocktopuss”. The printer was connected to a laptop through the usb port on the printer. The software was installed on the laptop by Aleph Objects and represents typical software currently used by the end user.



EMI Test Lab LLC

Electro Magnetic Interference Testing
EmiTestLab.com

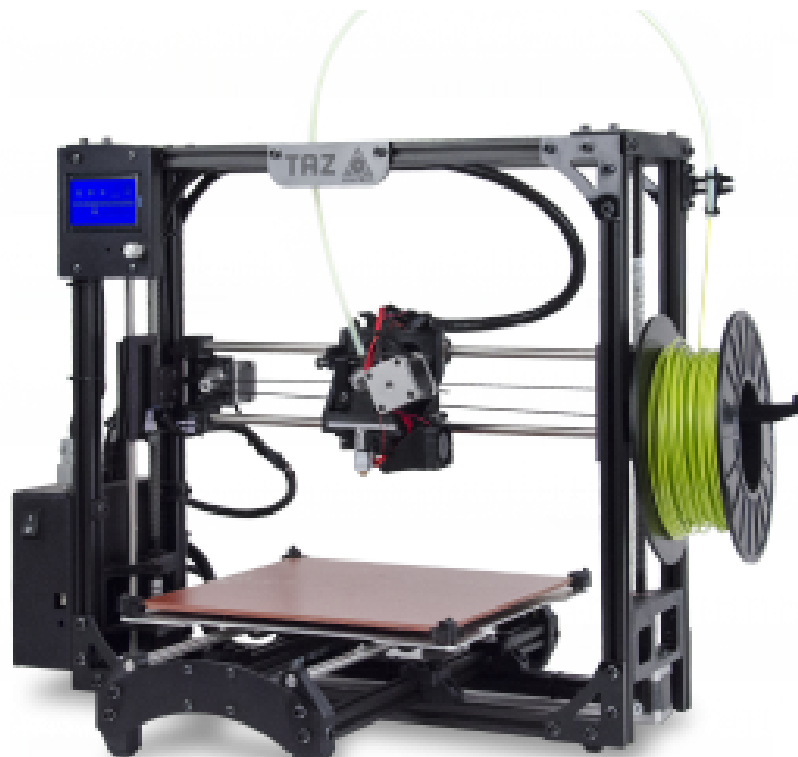

The LulzBot Juniperberry – 3D Printer

<https://www.lulzbot.com/products/lulzbot-taz-5-3d-printer>

Test Specification: EN 55022:2010 and EN 55024:2010

Model Name of EUT: LulzBot Juniperberry

Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EMITestLab.com

Revision 1.0



2 Emissions

The EUT (equipment under test) has been tested to determine conformity with the relevant emissions parts of the EN 55022:2010 standard.

AC Power line conducted and radiated field strength measurements concerning the emission of radiated and conducted electromagnetic disturbances were made.

Harmonic currents at the AC mains connection terminals of the EUT were measured in conformance with and according to EN 61000-3-2.

Voltage fluctuations and flicker at the AC mains connection terminals of the EUT were measured in conformance with and according to EN 61000-3-3.




EMI Test Lab LLC

Electro Magnetic Interference Testing
EmiTestLab.com

2.1 AC Mains Power Input Ports

The disturbance voltage emissions levels at the AC mains power port of the EUT were measured in conformity with and according to the criteria as stated below.

Basic standard	:	CISPR 22:2008
Test setup	:	EN 55022:2010
Frequency range 1	:	0.15 – 0.5 MHz
Limit	:	79.0 dBuV quasi peak, 66 dBuV average
Frequency range 2	:	0.5 – 30 MHz
Limit	:	73 dBuV quasi peak, 60 dBuV average

Results of the measurements concerning the emissions of voltage levels at the AC mains input port of the EUT.	<u>PASS Class A</u>
Name of Test Engineer:	Dennis King
Signature:	
Date:	12 May 2015
Remarks: The configuration was tested at 230VAC 50Hz. <u>Conducted Emission Summary:</u> <u>Peak data was over the Quasi Peak limit but when measured Quasi Peak, those frequencies are passing. All Average scans passed Average limits.</u> <u>The unit was printing during all conducted emissions tests.</u> <u>The Juniperberry power supply is a Mean Well supply in the Aleph designed enclosure.</u>	


Test Specification: EN 55022:2010 and EN 55024:2010

Prepared by EMI Test Lab - EMITestLab.com

Model Name of EUT: LulzBot Juniperberry

Manufacturer: Aleph Objects Inc.


Revision 1.0

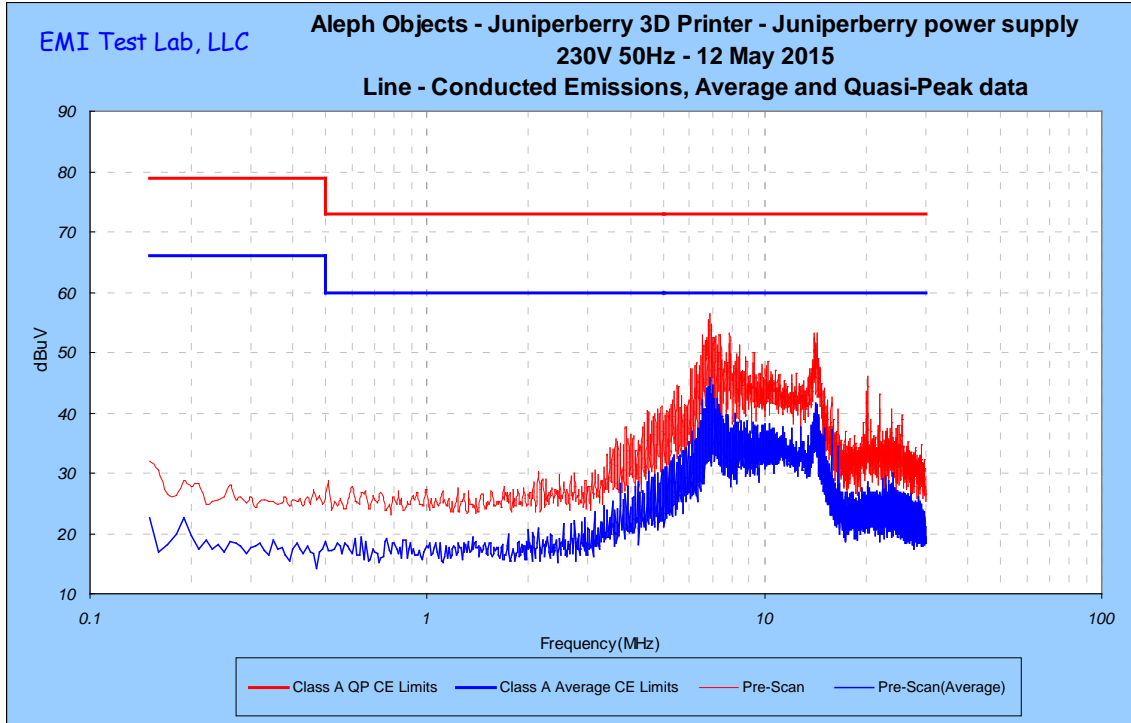

230 VAC 50 Hz Line

Peak passes the Quasi Peak (upper) and Average (lower) limits

Red is peak and blue is average

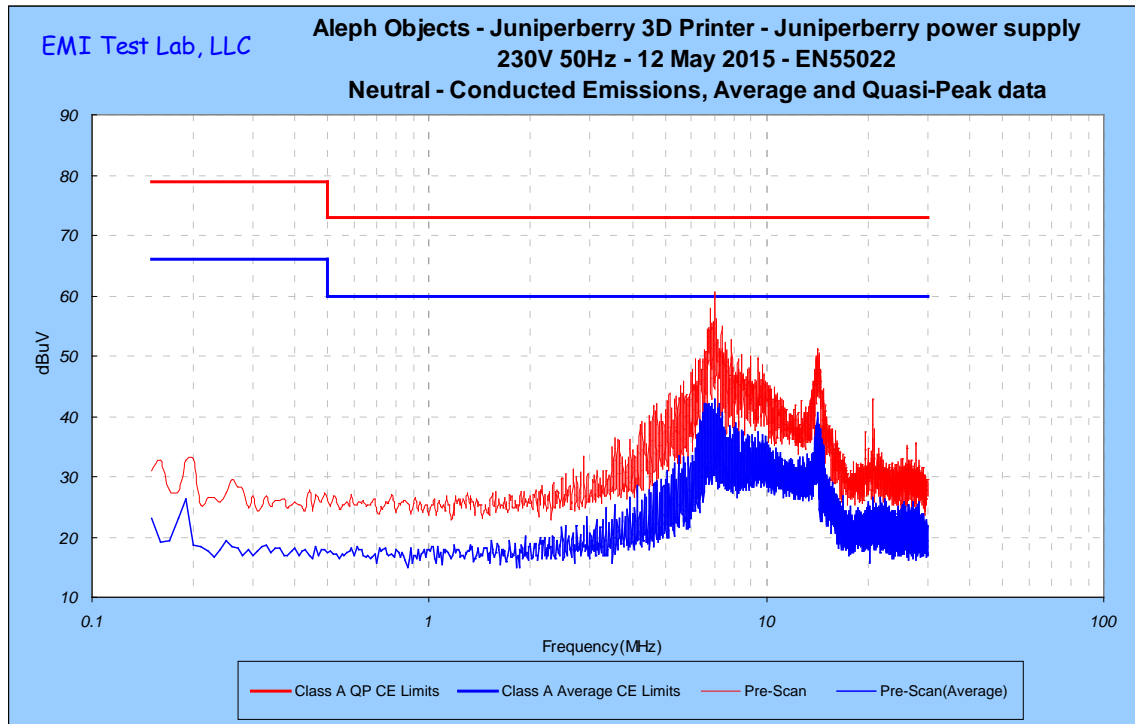

230 VAC 50 Hz Neutral


Red is peak and blue is average

Peak passes the Quasi Peak limit and Average passes the Average limit



EMI Test Lab LLC

Electro Magnetic Interference Testing
EmiTestLab.com

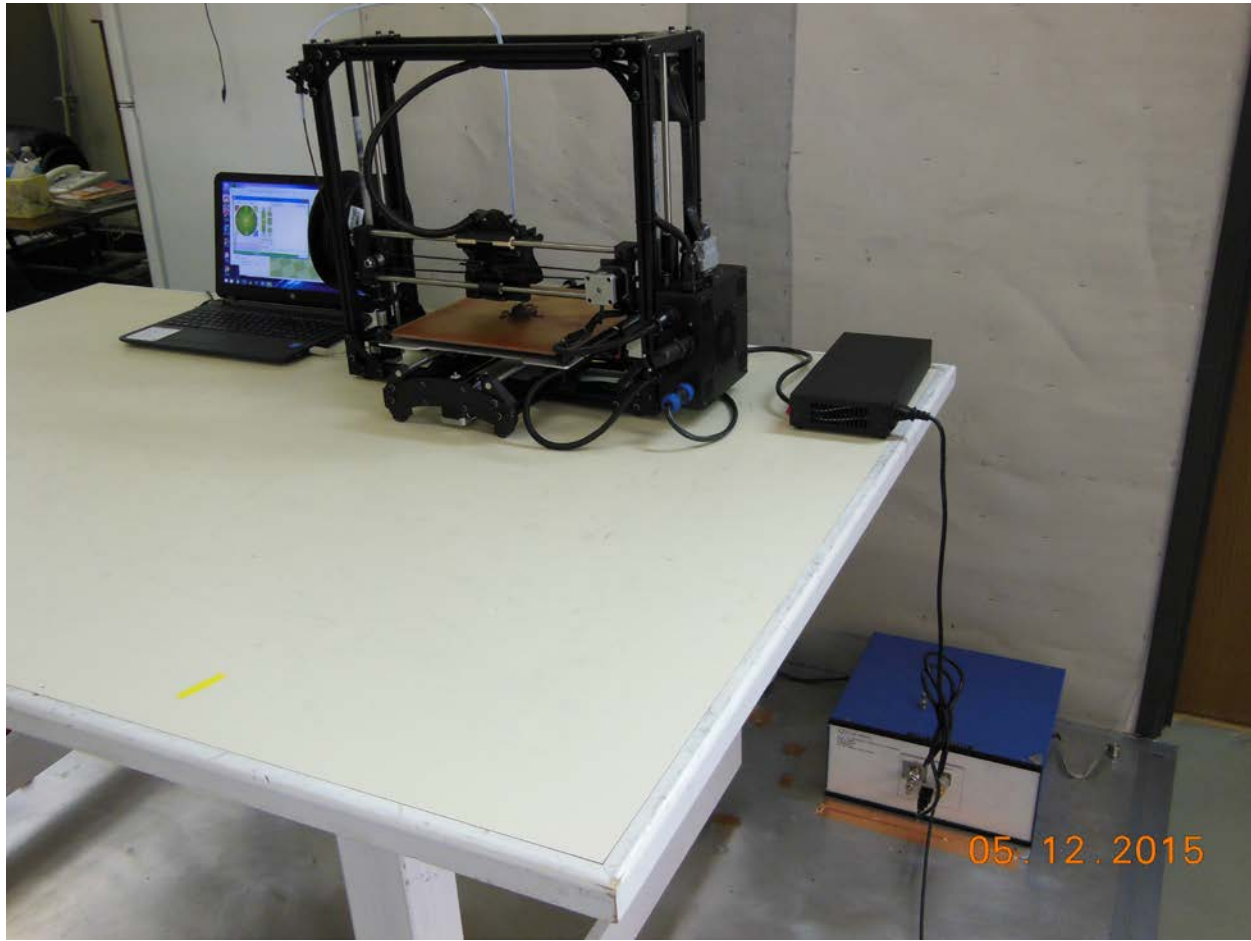

Conducted Emissions test setup

Test Specification: EN 55022:2010 and EN 55024:2010
Model Name of EUT: LulzBot Juniperberry
Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EMITestLab.com

Revision 1.0



EMI Test Lab LLC


Electro Magnetic Interference Testing
EmiTestLab.com

2.2 Enclosure

2.2.1 30-1,000 MHz

The radiated field strength levels (electric component) have been measured in conformity with and according to the criteria as stated below.

Basic standard	:	CISPR 22:2008
Test setup	:	EN 55022:2010
Limit distance	:	3 meters
Frequency range 1	:	30 -230 MHz
Limits	:	50 dBuV/m
Frequency range 2	:	230 – 1,000 MHz
Limits	:	57 dBuV/m

Results of the measurements concerning radiated electromagnetic fields (electric component) emitted by the EUT, enclosure, as a tested system	<u>PASS Class A</u>
<p style="text-align: right;">Name of Test Engineer:</p> <p style="text-align: right;">Signature:</p> <p style="text-align: right;">Date:</p>	<p>Dennis King</p>  <p>12 May 2015</p>
<p>Remarks: The configuration was tested at 230VAC 50Hz</p> <p><u>Radiated Emissions Summary:</u></p> <p>Passing Class A. The LCD ribbon cable is shielded. From previous testing the grounding of the LCD cable shield was improved to pass emissions. See modifications section for details.</p>	

Test Specification: EN 55022:2010 and EN 55024:2010
Model Name of EUT: LulzBot Juniperberry
Manufacturer: Aleph Objects Inc.


Prepared by EMI Test Lab - EMITestLab.com

Revision 1.0



EMI Test Lab LLC

Electro Magnetic Interference Testing
EmiTestLab.com

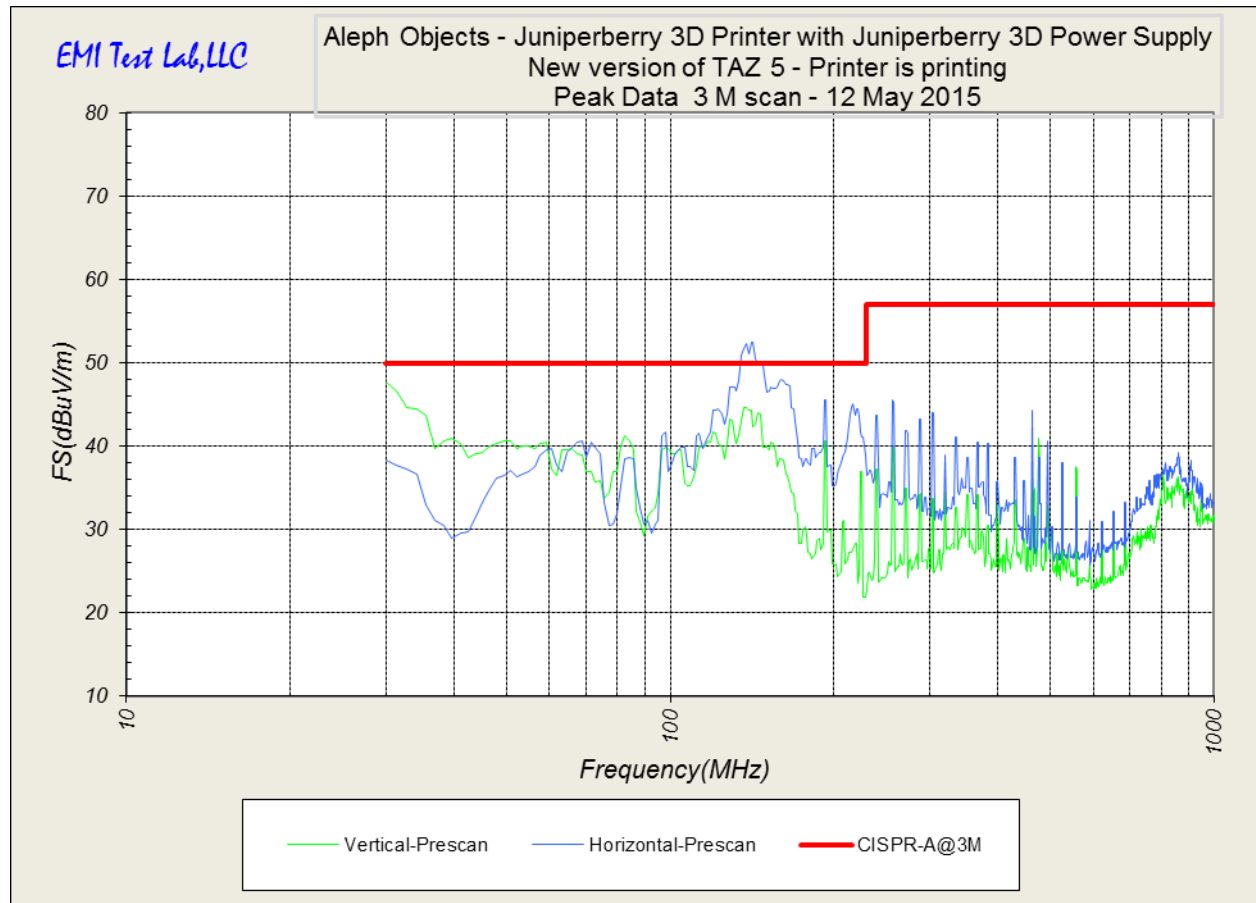

Peak Data – see the next chart for the passing Quasi peak data

Test Specification: EN 55022:2010 and EN 55024:2010

Prepared by EMI Test Lab - EMITestLab.com

Model Name of EUT: LulzBot Juniperberry


Manufacturer: Aleph Objects Inc.

Revision 1.0



EMI Test Lab LLC

Electro Magnetic Interference Testing
 EmiTestLab.com

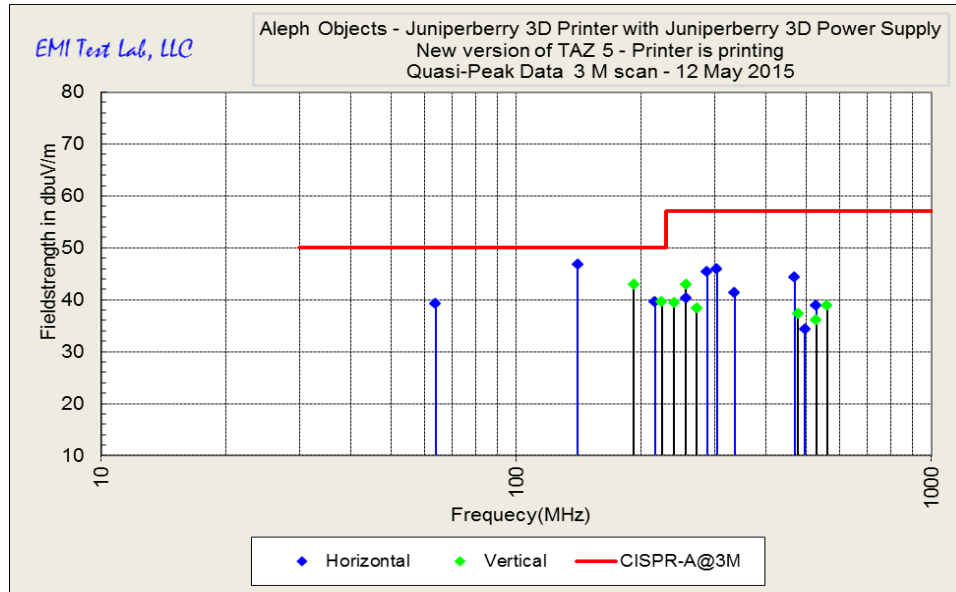

EMI Test Lab

1822 Skyway Drive, Unit J, Longmont Co
 Dennis King dennis@emitestlab.com , Cell 303-746-0611

Frequency	F.S. EUT	Limit	Azimuth	Height	Antenna Polarization	Limit delta
(MHz)	(dBuV/m)	(dBuV/m)	Degrees	Meters	H or V	dBuV
224.00	39.52	50	0.0	1	V	-10.5
240.00	39.37	57	12.0	1	V	-17.6
476.66	37.27	57	144.0	1	V	-19.7
191.99	42.90	50	192.0	1	V	-7.1
559.96	38.92	57	201.0	1	V	-18.1
527.98	36.15	57	216.0	1	V	-20.9
255.99	42.87	57	222.0	1	V	-14.1
272.00	38.42	57	249.0	1	V	-18.6
288.00	45.47	57	3.0	1	H	-11.5
304.00	45.92	57	12.0	1	H	-11.1
216.05	39.67	50	24.0	1	H	-10.3
495.97	34.37	57	120.0	1	H	-22.6
140.81	46.85	50	192.0	1	H	-3.2
527.97	38.87	57	216.0	1	H	-18.1
255.99	40.35	57	222.0	1	H	-16.7
64.01	39.30	50	261.0	1	H	-10.7
335.98	41.30	57	282.0	1	H	-15.7
468.77	44.37	57	342.0	1	H	-12.6

Quasi Peak Data


Test Specification: EN 55022:2010 and EN 55024:2010

Prepared by EMI Test Lab - EmiTestLab.com

Model Name of EUT: LulzBot Juniperberry

Manufacturer: Aleph Objects Inc.

Revision 1.0

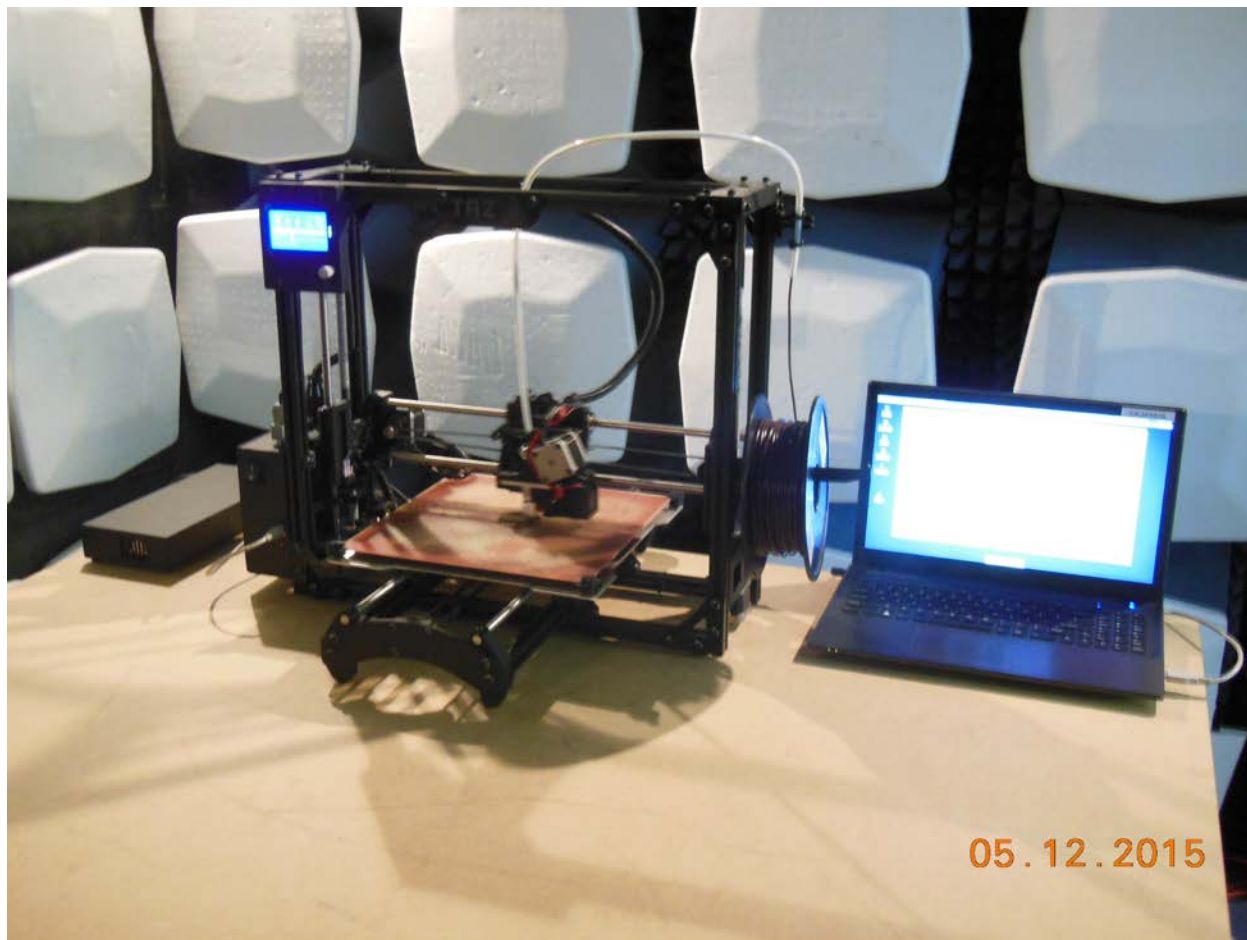

Radiated emissions test setup




EMI Test Lab LLC

Electro Magnetic Interference Testing
EmiTestLab.com

2.2.2 1-6 GHz

The radiated field strength levels (electric component) have been measured in conformity with and according to the criteria as stated below.



Basic standard	:	CISPR 22:2008
Test setup	:	EN 55022:2010
Limit distance	:	3 meters
Frequency range 1	:	1-3 GHz
Limits	:	Average 56 dBuV/m, Peak 76 dBuV/m
Frequency range 2	:	3-6 GHz
Limits	:	Average 60 dBuV/m, Peak 80 dBuV/m

Results of the measurements concerning radiated electromagnetic fields (electric component) emitted by the EUT, enclosure, as a tested system	<u>Passing Class A</u>
Name of Test Engineer:	Dennis King
Signature:	
Date:	29 May 2015
Remarks:	Passing Class A



EMI Test Lab LLC

Electro Magnetic Interference Testing
EmiTestLab.com

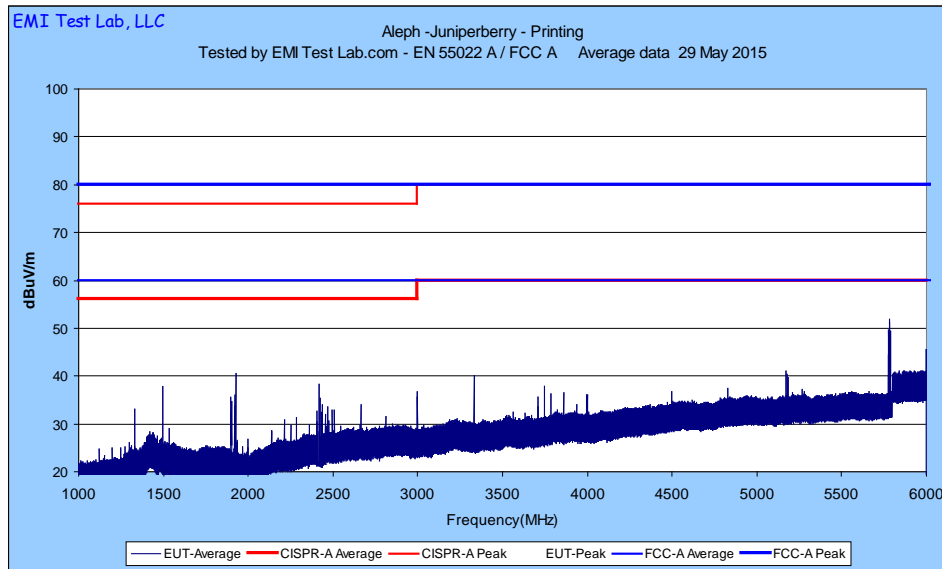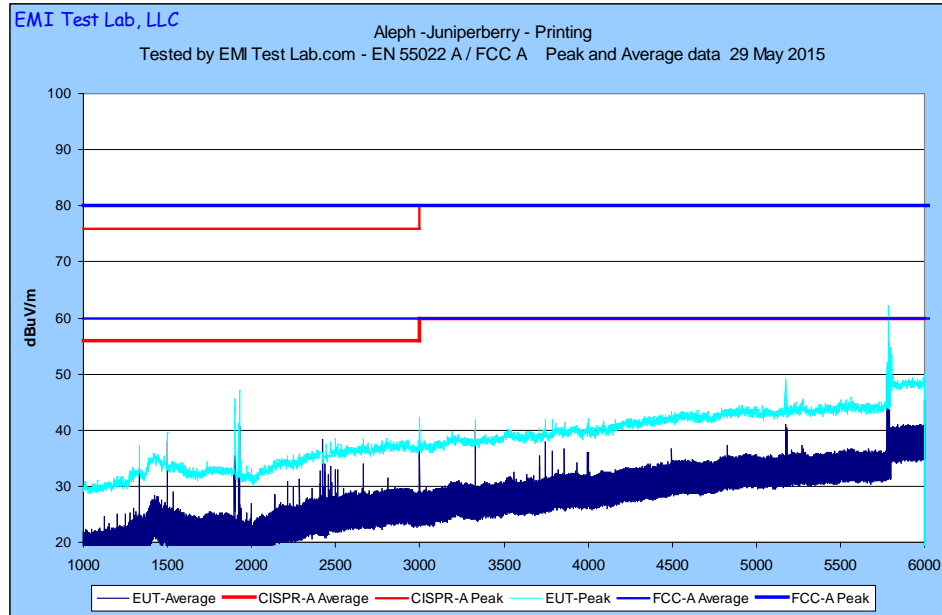

Test Specification: EN 55022:2010 and EN 55024:2010

Prepared by EMI Test Lab - EMITestLab.com

Model Name of EUT: LulzBot Juniperberry


Manufacturer: Aleph Objects Inc.

Revision 1.0



EMI Test Lab LLC

Electro Magnetic Interference Testing
EmiTestLab.com

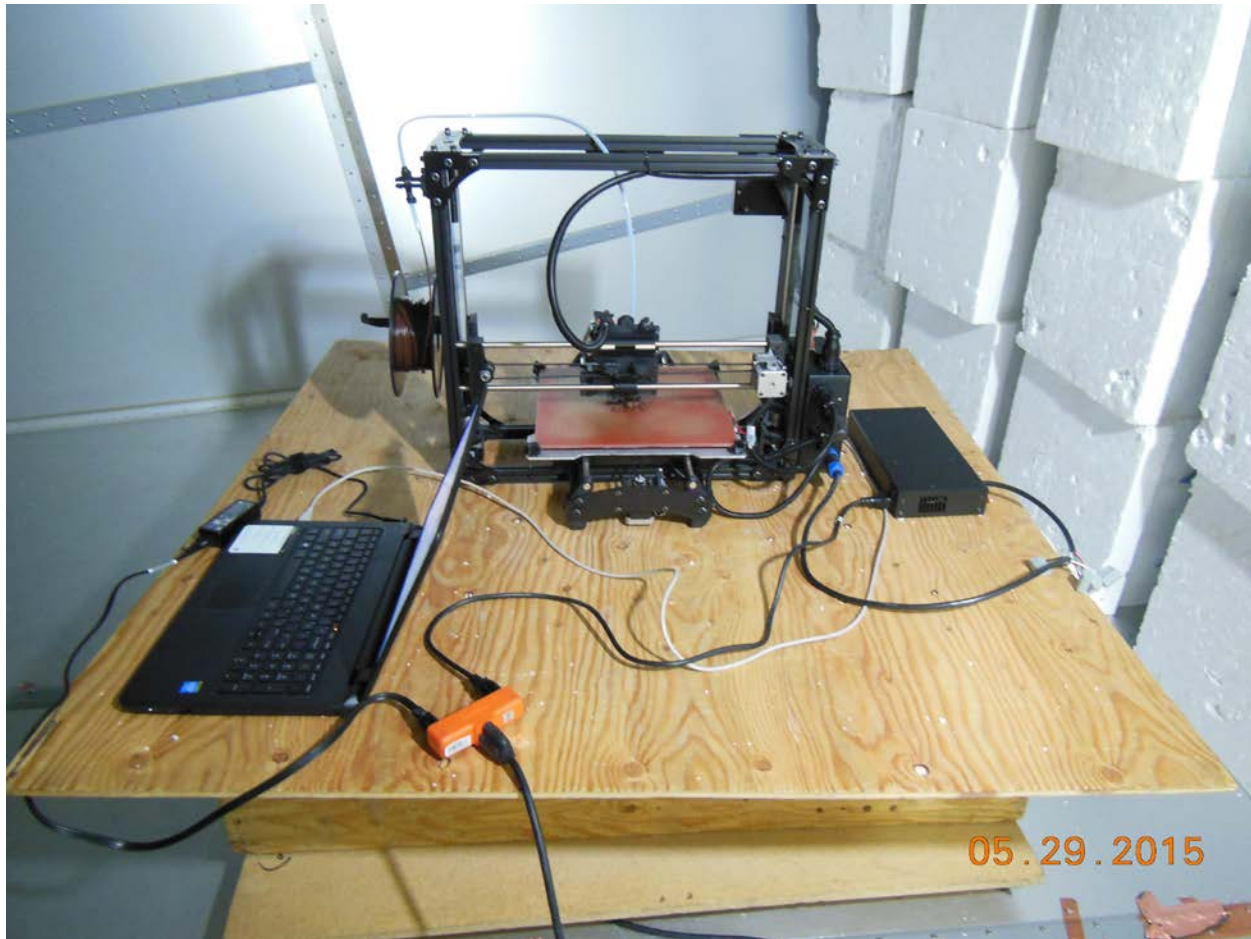

Radiated Emissions 1-6 GHz test setup

Test Specification: EN 55022:2010 and EN 55024:2010

Model Name of EUT: LulzBot Juniperberry

Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EmiTestLab.com

Revision 1.0




EMI Test Lab LLC

Electro Magnetic Interference Testing
EmiTestLab.com

2.3 Harmonic current emissions

The emissions of harmonic currents at the AC mains connection terminals of the EUT were measured in conformance with and according to the criteria as stated below.

Basic standard : EN 61000-3-2
Test setup : EN 61000-3-2
Frequency range : 100 Hz – 2000 Hz

Results of the measurements concerning the emission of harmonic currents at the AC mains connection terminals of the EUT	<u>PASS</u>
Name of Test Engineer:	Dennis King
Signature:	
Date:	29 May 2015
Remarks:	The unit was tested at 230VAC 50Hz. The 3D printer was printing during the entire test.

Test Specification: EN 55022:2010 and EN 55024:2010
Model Name of EUT: LulzBot Juniperberry
Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EMITestLab.com

Revision 1.0



EMI Test Lab LLC

Electro Magnetic Interference Testing
EmiTestLab.com

Data – the EUT is printing

HA-PC Link Plus. Software v2.02. Firmware v2.81

Report Number : 62

Tested On : 29 May 2015 15:15 for 150 Seconds.

Equipment Under Test : Juniperberry 3D Printer

Serial Number : KT-PR0036NA-0001

Tested by : Dennis King

Supply Voltage : 229.3 to 231.2 Vrms 327.2 Vpk Frequency : 50.08 to 50.13 Hz

Load Power : 35.78 to 511.90 W 162.4 VA Power Factor 0.748

Load Current : 0.3 to 1789.7 Arms 0.5 to 3190.6 Apk Crest Factor: 2.193

Measurement Standard : EN61000-4-7:2002

Limits Applied : EN61000-3-2 Class A Limits Apply.

Harmonic Number	Limit Current mA	Average (filtered) mA	% Limit mA	max. Value (Filtered)	% Limit	Assessment
-----------------	------------------	-----------------------	------------	-----------------------	---------	------------

Fundamental :		841.1				
2 :	1080.0	222.5	20.6	250.1	23.2	Pass
3 :	2300.0	144.0	6.3	155.3	6.8	Pass
4 :	430.0	37.8	8.8	54.6	12.7	Pass
5 :	1140.0	34.1	3.0	44.2	3.9	Pass
6 :	300.0	19.2	6.4	29.4	9.8	Pass
7 :	770.0	23.6	3.1	30.3	3.9	Pass
8 :	230.0	15.0	6.5	21.9	9.5	Pass
9 :	400.0	18.8	4.7	23.9	6.0	Pass
10 :	184.0	12.0	6.5	17.4	9.5	Pass
11 :	330.0	14.5	4.4	18.3	5.5	Pass
12 :	153.3	11.1	7.2	15.8	10.3	Pass
13 :	210.0	12.2	5.8	16.7	8.0	Pass
14 :	131.4	9.4	7.2	13.3	10.1	Pass
15 :	150.0	11.9	7.9	14.5	9.7	Pass
16 :	115.0	9.0	7.8	12.5	10.9	Pass

Test Specification: EN 55022:2010 and EN 55024:2010

Prepared by EMI Test Lab - EMITestLab.com

Model Name of EUT: LulzBot Juniperberry

Manufacturer: Aleph Objects Inc.

Revision 1.0



EMI Test Lab LLC

Electro Magnetic Interference Testing EmiTestLab.com

17 :	132.3	9.8	7.4	12.4	9.4	Pass
18 :	102.2	7.7	7.5	10.4	10.2	Pass
19 :	118.4	8.7	7.3	11.1	9.4	Pass
20 :	92.0	7.7	8.4	10.6	11.5	Pass
21 :	107.1	9.6	9.0	11.6	10.8	Pass
22 :	83.6	7.2	8.6	9.5	11.4	Pass
23 :	97.8	7.7	7.9	9.8	10.0	Pass
24 :	76.7	6.4	8.3	8.6	11.2	Pass
25 :	90.0	7.1	7.9	9.1	10.1	Pass
26 :	70.8	6.1	8.6	8.0	11.3	Pass
27 :	83.3	7.4	8.9	9.1	10.9	Pass
28 :	65.7	6.0	9.1	7.9	12.0	Pass
29 :	77.6	6.9	8.9	8.4	10.8	Pass
30 :	61.3	5.5	9.0	7.1	11.6	Pass
31 :	72.6	6.7	9.2	8.0	11.0	Pass
32 :	57.5	5.3	9.2	7.0	12.2	Pass
33 :	68.2	5.9	8.7	7.5	11.0	Pass
34 :	54.1	4.7	8.7	6.1	11.3	Pass
35 :	64.3	5.8	9.0	7.1	11.0	Pass
36 :	51.1	4.9	9.6	6.4	12.5	Pass
37 :	60.8	5.5	9.0	6.6	10.9	Pass
38 :	48.4	4.4	9.1	5.7	11.8	Pass
39 :	57.7	5.7	9.9	6.8	11.8	Pass
40 :	46.0	4.6	10.0	6.1	13.3	Pass
21 - 39 :	251.4	21.8	8.7	26.4	10.5	-

Test Specification: EN 55022:2010 and EN 55024:2010

Model Name of EUT: LulzBot Juniperberry

Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EMITestLab.com

Revision 1.0



EMI Test Lab LLC

Electro Magnetic Interference Testing
EmiTestLab.com



Test setup for AC power line harmonics

Test Specification: EN 55022:2010 and EN 55024:2010

Model Name of EUT: LulzBot Juniperberry

Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EmiTestLab.com


Revision 1.0



2.4 Voltage fluctuations and flicker

Voltage fluctuations and flicker at the AC mains connection terminals of the EUT were measured in conformance with and according to the criteria as stated below.

Basic standard : EN 61000-3-3
Test setup : EN 61000-3-3

Results of the measurements concerning voltage fluctuations and flicker at the AC mains connection terminals of the EUT	<u>PASS</u>
Name of Test Engineer:	Dennis King
Signature:	
Date:	29 May 2015
Remarks:	The unit was tested at 230VAC 50Hz. The 3D printer was printing during the entire test.



EMI Test Lab LLC

Electro Magnetic Interference Testing
EmiTestLab.com

LulzBot Mini 3D printer – data - Flicker

HA-PC Link Plus. Software v2.02. Firmware v2.81

Report Number : 63

Tested On : 29 May 2015 15:44 for 600 Seconds.

Equipment Under Test : Juniperberry 3D Printer

Serial Number : Proto #1

Tested by : Dennis King

Supply Voltage : 231.0 to 231.1 Vrms 327.1 Vpk Frequency : 50.08 to 50.16 Hz

Load Current : 0.4 to 650.8 Arms 0.8 to 1333.8 Apk Crest Factor: 2.085

Test Method: EN61000-3-3:2008

Voltage Variations :

Highest Level: +0.63%

Lowest Level: +0.26%

d(max): 0.38% PASS

Highest d(t) of 500ms: 0.00% PASS

Present d(t) over 3.33%: 0.00 Seconds

Longest d(t) over 3.33%: 0.00 Seconds

Highest Steady State: +0.47%

Lowest Steady State: +0.47%

Max d(c) Between Adjacent: 0.00% PASS

Max d(c) Between Any: 0.00%

Short Term Flicker Pst: 0.26 PASS

Flicker Results :

Pst Classifier	Plt Calculation
Duration	Flicker Interval Pst
0.1%	0.19
0.7%	0.16
1.0%	0.16
1.5%	0.16
2.2%	0.15
3%	0.15
4%	0.14

Test Specification: EN 55022:2010 and EN 55024:2010

Prepared by EMI Test Lab - EMITestLab.com

Model Name of EUT: LulzBot Juniperberry

Manufacturer: Aleph Objects Inc.

Revision 1.0



EMI Test Lab LLC

Electro Magnetic Interference Testing
EmiTestLab.com

6%	0.13
8%	0.13
10%	0.13
13%	0.13
17%	0.12
30%	0.11
50%	0.10
80%	0.09



Test setup for Voltage fluctuations and flicker EN 61000-3-3

Test Specification: EN 55022:2010 and EN 55024:2010

Model Name of EUT: LulzBot Juniperberry

Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EmiTestLab.com

Revision 1.0



3 Immunity

The EUT has been tested in conformity with parts of the standard EN 55024:2010 (immunity) concerning susceptibility and transient, conducted and radiated disturbances including electrostatic discharges.

3.1 Performance criteria

The general principles (performance criteria) for the evaluation of the immunity test results are given below. The details are in EN 55024:2010

Performance Criterion A: The apparatus shall continue to operate as intended during the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as intended.

Performance Criterion B: The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of function) specified by the manufacturer, when the apparatus is used as intended. During the test, degradation of performance is allowed, however, no change of actual operating state or stored data is allowed.

Performance Criterion C: Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls, or by any operation specified in the instructions for use.



EMI Test Lab LLC


Electro Magnetic Interference Testing
EmiTestLab.com

3.2 Enclosure Port

3.2.1 Radio-frequency electromagnetic field. Amplitude modulated.

The susceptibility of the EUT to radio-frequency electromagnetic fields has been tested in conformity with and according to the criteria as stated below.

Basic standard	:	EN55024:2010
Test setup	:	EN61000-4-3
Frequency range	:	80 MHz to 1000 MHz
Field strength level	:	3 V/m (selected w/o modulation, applied w/mod.)
Modulation	:	1 kHz AM modulation, 80% depth
Performance criteria	:	Criteria A

Results of the measurements concerning the susceptibility of the EUT to radio-frequency electromagnetic fields	<u>PASS Criteria A</u>
Name of Test Engineer:	Dennis King
Signature:	
Date:	15 May 2015
Remarks: <u>No loss of performance was observed during and after the test, all sides and both antenna polarizations meet Performance Criteria A.</u> <u>Radiated Immunity Summary:</u> Configuration :The printer was printing during the entire test: PASS 3 V/M	

Test Specification: EN 55022:2010 and EN 55024:2010
Model Name of EUT: LulzBot Juniperberry
Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EMITestLab.com

Revision 1.0



EMI Test Lab LLC

Electro Magnetic Interference Testing
EmiTestLab.com



Radiated immunity test setup – 80-1,000 MHz

All 4 sides, Vertical and Horizontal were checked at 3 V/M
No errors were detected - passing Criteria A.

Test Specification: EN 55022:2010 and EN 55024:2010
Model Name of EUT: LulzBot Juniperberry
Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EmiTestLab.com

Revision 1.0




EMI Test Lab LLC

Electro Magnetic Interference Testing
EmiTestLab.com

3.2.2 Electrostatic discharge

The susceptibility of the EUT to electrostatic discharge was tested.


- Basic standard : EN 55024:2010
- Test setup : EN 61000-4-2
- Test levels : +- 2,4kV and +- 8 kV air discharge
+- 2kV and +- 4 kV contact discharge
+- 2kV and +- 4 kV, indirect, horizontal and vertical coupling plane.
- Performance criteria : B

Results of the test concerning the susceptibility of the EUT to electrostatic discharges (enclosure port)	<u>Pass Criteria B (with conditions – see conditions of acceptability)</u>
<p style="text-align: right;">Name of Test Engineer:</p> <p style="text-align: right;">Signature:</p> <p style="text-align: right;">Date:</p>	<p>Dennis King</p>  <p>29 May 2015</p>
<p>Remarks:</p> <p>The printer had problems when the discharge was made to the box around the electronics or the LCD display. Also indirect discharge to the electronics stopped the unit.</p> <p><u>Conditions of Acceptability:</u></p> <p>A statement will be made in the user guide to use esd precautions when touching the unit, either discharging to an earth ground or wearing an esd strap.</p> <p>Per the Manufacturer, this is acceptable operation of the EUT.</p>	

Test Specification: EN 55022:2010 and EN 55024:2010
Model Name of EUT: LulzBot Juniperberry
Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EMITestLab.com

Revision 1.0

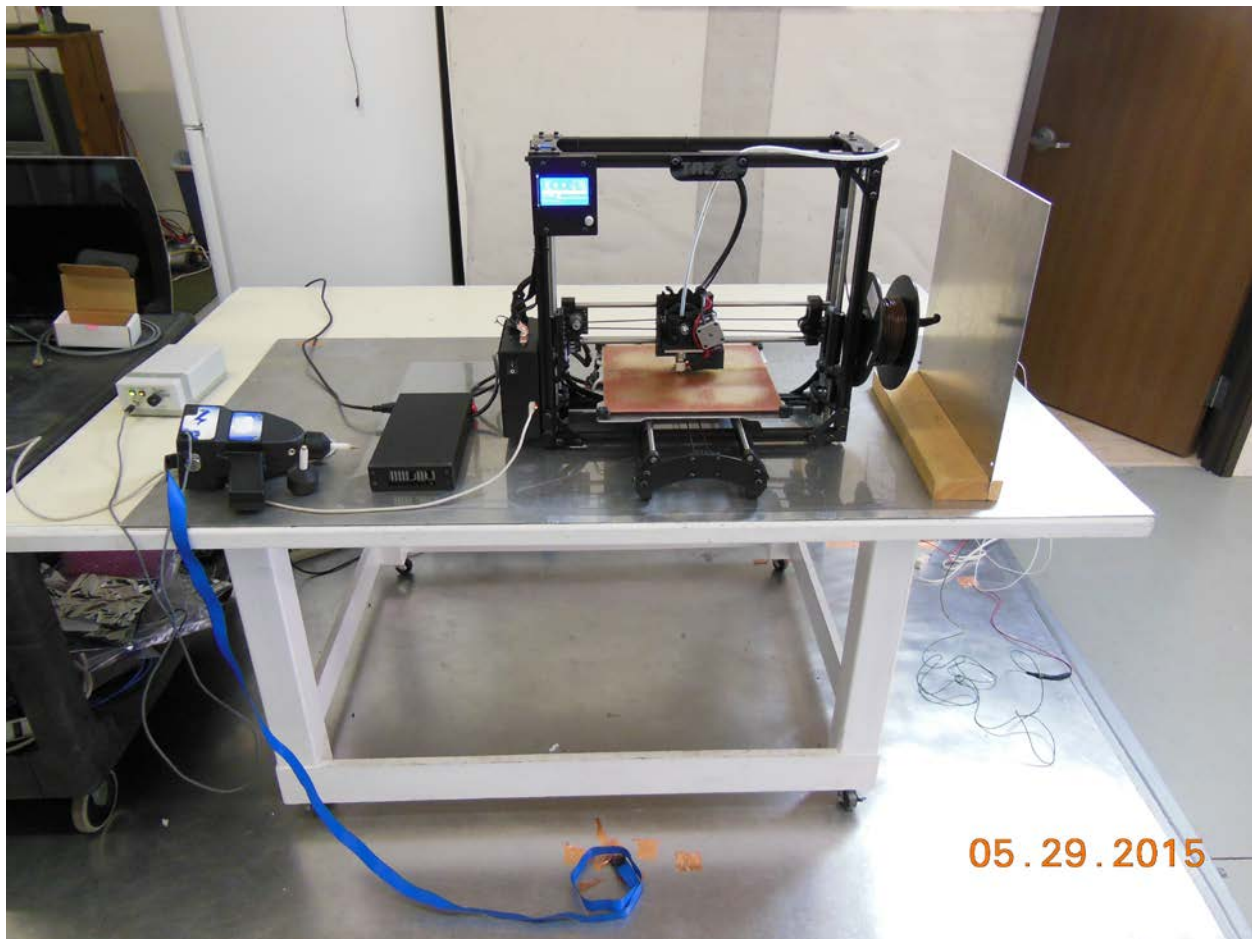

ESD test setup per EN 61000-4-2

Horizontal and Vertical coupling planes were checked

All metal parts that the user might touch were tested for contact discharge. All plastic areas that the user might touch were tested for air discharge.

Test Specification: EN 55022:2010 and EN 55024:2010

Prepared by EMI Test Lab - EMI Test Lab.com

Model Name of EUT: LulzBot Juniperberry

Manufacturer: Aleph Objects Inc.

Revision 1.0




Signal ports including telecommunication ports

3.2.3 Radio-frequency (common mode). Amplitude modulated

The susceptibility of the EUT to radio-frequency (common mode, amplitude modulated) signals to be tested in conformity with and according to the criteria as stated below

Basic Standard	:	EN 55024:2010
Test setup	:	EN 61000-4-6
Frequency range	:	0.15 – 80 MHz
Test level	:	3 Vrms
Modulation	:	1 kHz AM to a depth of 80%
Source impedance	:	150 Ohms
Performance criteria	:	Criteria A

Note: Conducted only on ports interfacing with cables whose total length, according to the manufacturer's functional specification, may exceed 3 meters.

Results of the test concerning the susceptibility of the EUT to radio-frequency signals (common mode, AM modulated applied to signal and telecom ports)	<u>Not Applicable</u>
Name of Test Engineer:	Dennis King
Signature:	
Date:	10 June 2015
Remarks:	There are no interconnecting cables on the unit that exceed 3 meters. See the test plan.



EMI Test Lab LLC


Electro Magnetic Interference Testing
EmiTestLab.com

3.2.4 Fast Transients

The susceptibility of the EUT to fast transients has been tested in conformity with and according to the criteria as stated below.

Basic standard : EN 55024:2010
Test setup : EN 61000-4-4
Test level : +- 0.5 KV
Tr/Th : 5/50 nSec
Repetition frequency : 5 kHz
Performance criteria : Criteria B

Note: Conducted only on ports interfacing with cables whose total length, according to the manufacturer's functional specification, may exceed 3 meters.

Results of the test concerning the susceptibility of the EUT to fast transients	<u>Not Applicable</u>
Name of Test Engineer:	Dennis King
Signature:	
Date:	10 June 2015
Remarks:	There are no interconnecting cables on the unit that exceed 3 meters. See the test plan.

Test Specification: EN 55022:2010 and EN 55024:2010

Prepared by EMI Test Lab - EmiTestLab.com

Model Name of EUT: LulzBot Juniperberry

Manufacturer: Aleph Objects Inc.

Revision 1.0



EMI Test Lab LLC


Electro Magnetic Interference Testing
EmiTestLab.com

3.3 AC input and AC output power ports

3.3.1 Radio-frequency (common mode, amplitude modulated)

The susceptibility of the EUT to radio-frequency signals (common mode, amplitude modulated, has been tested in conformity with and according to the criteria as stated below.

Basic standard	:	EN 55024:2010
Test setup	:	EN61000-4-6
Frequency range	:	0.15 – 80 MHz
Test level	:	3 Vrms
Source impedance	:	150 Ohms
Performance criteria	:	Criteria A

Results of the test concerning the susceptibility of the EUT to radio-frequency signals (common mode, amplitude modulated) – AC input and AC output power ports	<u>Pass Criteria A – 3 Vrms</u>
Name of Test Engineer: Signature: Date:	Dennis King  22 May 2015
Remarks: Tested at 230 VAC 50 Hz – the EUT continued to operate as intended with no loss of data or function. The JUNIPERBERRY passed Criteria A, 3 Vrms PASS	

Test Specification: EN 55022:2010 and EN 55024:2010
Model Name of EUT: LulzBot Juniperberry
Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EMITestLab.com

Revision 1.0




EMI Test Lab LLC

Electro Magnetic Interference Testing
EmiTestLab.com



**AC power line conducted immunity setup per EN 61000-4-6
The injected signal is monitored with the current clamp**

The spectrum analyzer display is recorded below

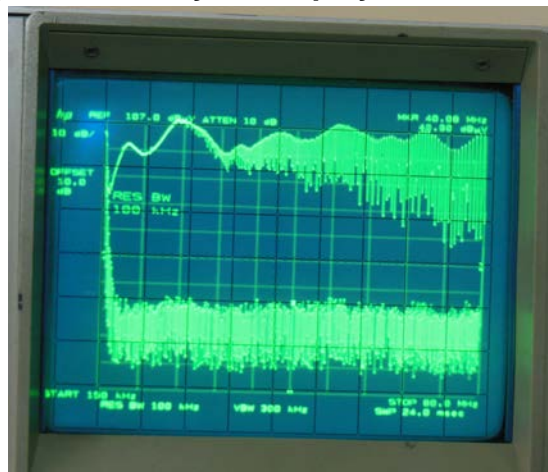

Test Specification: EN 55022:2010 and EN 55024:2010

Model Name of EUT: LulzBot Juniperberry

Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EmiTestLab.com

Revision 1.0




EMI Test Lab LLC

Electro Magnetic Interference Testing
EmiTestLab.com

3.3.2 Surges

The susceptibility of the EUT to surges has been tested in conformity with and according to the criteria as stated below

- Basic Standard : EN 55024:2010
- Test setup : EN 61000-4-5
- Test level 1 : +- 0.5 kV, +- 1.0 kV, Differential mode
- Test level 2 : +- 0.5 kV, +- 1.0 kV, +- 2 kV Common Mode
- Tr/Th : 1.2/50(8/20) micro Seconds
- Number of pulses
- Per phase angle/voltage : 5
- Performance criteria : Criteria B
- Note : **Applicable only to input AC ports**

Results of the test concerning the susceptibility of the EUT to surges (AC input and AC output power ports)	<u>Pass Criteria A</u>
Name of Test Engineer:	Dennis King
Signature:	
Date:	16 May 2015
Remarks: Tested at the highest voltage levels since this is a confirmation of the original passing data from the power supply manufacturer. PASS	

Test Specification: EN 55022:2010 and EN 55024:2010
Model Name of EUT: LulzBot Juniperberry
Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EmiTestLab.com

Revision 1.0



Surge Test Data

=====

Aleph Objects 16 May 2015

=====

REMOTE/TESTER RUN

Versions: SW v3.00 FW v3.01 Str v3.00 CEMASTER
Operator: Uriah Higgins
Sequence File: CISPR 24 - ITE Equipment - 1kV Diff 2kV CM.SEQ
EUT: Aleph LulzBot Juniperberry

=====

230 VAC

10:47:52A SEQUENCE START

SEQUENCE	TYPE	SEQUENCE DESCRIPTION					
Srg 1.2/50	User Defined	EN 61000-4-5 Surge - Diff 1kV - CM 2kV					
	Waveform	Voltage	Output:LC	Phs Ref	Phs Ang	Tests	Delay
10:47:52A	2 Ohm	1000V	MAINS:L1/L2	L1	0 deg.	5	60 sec.
10:52:58A	2 Ohm	1000V	MAINS:L1/L2	L1	90 deg.	5	60 sec.
10:58:03A	2 Ohm	1000V	MAINS:L1/L2	L1	270 deg.	5	60 sec.
11:03:09A	2 Ohm	-1000V	MAINS:L1/L2	L1	0 deg.	5	60 sec.
11:08:14A	2 Ohm	-1000V	MAINS:L1/L2	L1	90 deg.	5	60 sec.
11:13:20A	2 Ohm	-1000V	MAINS:L1/L2	L1	270 deg.	5	60 sec.
11:18:25A	12 Ohm	2000V	MAINS:L1/PE	L1	0 deg.	5	60 sec.
11:23:31A	12 Ohm	2000V	MAINS:L1/PE	L1	90 deg.	5	60 sec.
11:28:37A	12 Ohm	2000V	MAINS:L1/PE	L1	270 deg.	5	60 sec.

11:29:00A SEQUENCE PAUSED

11:37:32A SEQUENCE RESUMED

11:42:32A	12 Ohm	-2000V	MAINS:L1/PE	L1	0 deg.	5	60 sec.
11:47:38A	12 Ohm	-2000V	MAINS:L1/PE	L1	90 deg.	5	60 sec.
11:52:44A	12 Ohm	-2000V	MAINS:L1/PE	L1	270 deg.	5	60 sec.
11:57:50A	12 Ohm	2000V	MAINS:L2/PE	L1	0 deg.	5	60 sec.
12:02:56P	12 Ohm	2000V	MAINS:L2/PE	L1	90 deg.	5	60 sec.

Test Specification: EN 55022:2010 and EN 55024:2010 Prepared by EMI Test Lab - EMITestLab.com

Model Name of EUT: LulzBot Juniperberry

Manufacturer: Aleph Objects Inc.

Revision 1.0



EMI Test Lab LLC

Electro Magnetic Interference Testing EmiTestLab.com

12:08:02P 12 Ohm 2000V MAINS:L2/PE L1 270 deg. 5 60 sec.
12:13:08P 12 Ohm -2000V MAINS:L2/PE L1 0 deg. 5 60 sec.
12:18:14P 12 Ohm -2000V MAINS:L2/PE L1 90 deg. 5 60 sec.
12:23:20P 12 Ohm -2000V MAINS:L2/PE L1 270 deg. 5 60 sec.

12:28:26P SEQUENCE COMPLETE

Unit continued to print throughout the test.



Test setup according to EN 61000-4-5, Surge

Test Specification: EN 55022:2010 and EN 55024:2010

Prepared by EMI Test Lab - EMITestLab.com

Model Name of EUT: LulzBot Juniperberry

Manufacturer: Aleph Objects Inc.


Revision 1.0



3.3.3 Fast Transients

The susceptibility of the EUT to fast transients (common mode) has been tested in conformity with and according to the criteria as stated below.

Basic standard : IEC/EN 60601-1-2:2007
Test setup : EN 61000-4-4
Test level : +- 1 KV
Tr/Th : 5/50 nSec
Repetition frequency : 5 kHz
Performance criteria : Criteria B
Note : **Conducted on the AC input.**

Results of the test concerning the susceptibility of the EUT to fast transients (common mode, AC input and AC output ports)	<u>Pass Criteria A</u>
Name of Test Engineer:	Dennis King
Signature:	
Date:	27 May 2015
Remarks: Tested at 230 VAC 50 Hz while printing. The unit continued to function as intended. Tested with Steward ferrite P/N 28A2029-0A0 - on the DC out to the EUT wires - to pass EFT, will be replaced in production with P/N 28B0672-000. According to data sheets, this part is as good as or better than the part used during testing.	



EMI Test Lab LLC

Electro Magnetic Interference Testing
EmiTestLab.com

Test Data

KeyTek Instrument Co. ECAT Log File

Software:E400 Burstware V4.15 (c)1996

Firmware:: 5.11.v

Modules:

Row 1 Right:E412 SN:-32612

Test Started at 11:26.02 on MAY 27,2015

Test File:C:\KEYTEK\ECAT\EFT\ITE_1KV.EFT

Operator :dennis king

EUT:juniperberry

Comments: 230 VAC – clamp on ferrite on dc wires between Power supply and EUT – doesn't matter which end E400:

Coupling:Coupler:AC

Coupling:All

Voltage:Fixed 1000 V

Polarity:Alternate 1 each

Units:mSec

Frequency:Fixed 5000 Hz

Period:Fixed 300 ms

Phase:Fixed 0 dg

Duration:Fixed 15 mS

Repeat:0

E400:Wait time 10 Seconds

E400:Duration time 1 Minute

E400:EUT power:ON

E400:Phase Mode Period

E400:Order:Repeat,Polarity,Coupling

Time	Action	Volts(V)	Freq	Dur.	Period	Phase	Source	At	Cpl
11:26.11:	Burst	1000	5000 Hz	15 mS	300	RND	E412	E412	L1
11:27.11:	EFT Step Ended								
11:27.23:	Burst	1000	5000 Hz	15 mS	300	RND	E412	E412	L1,L2
11:28.22:	EFT Step Ended								
11:28.34:	Burst	1000	5000 Hz	15 mS	300	RND	E412	E412	L1,PE
11:29.34:	EFT Step Ended								
11:29.45:	Burst	1000	5000 Hz	15 mS	300	RND	E412	E412	L1,L2,PE
11:30.45:	EFT Step Ended								
11:30.57:	Burst	1000	5000 Hz	15 mS	300	RND	E412	E412	L2
11:31.58:	EFT Step Ended								
11:32.09:	Burst	1000	5000 Hz	15 mS	300	RND	E412	E412	L2,PE
11:33.09:	EFT Step Ended								
11:33.20:	Burst	1000	5000 Hz	15 mS	300	RND	E412	E412	PE

Test Specification: EN 55022:2010 and EN 55024:2010

Prepared by EMI Test Lab - EMITestLab.com

Model Name of EUT: LulzBot Juniperberry

Manufacturer: Aleph Objects Inc.

Revision 1.0



EMI Test Lab LLC

Electro Magnetic Interference Testing EmiTestLab.com

11:34.20: EFT Step Ended
11:34.32: Burst -1000 5000 Hz 15 mS 300 RND E412 E412 L1
11:35.32: EFT Step Ended
11:35.44: Burst -1000 5000 Hz 15 mS 300 RND E412 E412 L1,L2
11:36.44: EFT Step Ended
11:39.42: 11:39.49: Burst -1000 5000 Hz 15 mS 300 RND E412 E412 L1,PE
11:40.49: EFT Step Ended
11:40.59: Burst -1000 5000 Hz 15 mS 300 RND E412 E412 L1,L2,PE
11:41.59: EFT Step Ended
11:42.09: Burst -1000 5000 Hz 15 mS 300 RND E412 E412 L2
11:43.09: EFT Step Ended
11:43.19: Burst -1000 5000 Hz 15 mS 300 RND E412 E412 L2,PE
11:44.19: EFT Step Ended
11:44.29: Burst -1000 5000 Hz 15 mS 300 RND E412 E412 PE
11:45.29: EFT Step Ended
11:45.29: Test Complete
11:45.29: Log Closed



Test Setup per EN 61000-4-4

Test Specification: EN 55022:2010 and EN 55024:2010

Prepared by EMI Test Lab - EMI Test Lab.com

Model Name of EUT: LulzBot Juniperberry

Manufacturer: Aleph Objects Inc.


Revision 1.0



3.3.4 Voltage Dips and Interruptions

The susceptibility of the EUT to voltage dips and interruptions has been tested in conformity with and according to the criteria as stated below.

Basic Standard : EN 55024:2010
Test setup : EN61000-4-11
Test level (a) : Line at <5% of nominal for 0.5 cycles
Test level (b) : Line at 70% of nominal for 25 cycles
Test level (c) : Line at <5% of nominal for 250 cycles

Results of the test concerning the susceptibility of the EUT to voltage dips and interruptions – AC input and AC output ports	Pass
Name of Test Engineer:	Dennis King
Signature:	
Date:	16 May 2015
Remarks:	Tested at 230 VAC 50 Hz while printing. The unit continued to function as intended.



EMI Test Lab LLC

Electro Magnetic Interference Testing
EmiTestLab.com

Test Data

=====

Electrom Instruments 16 May 2015

=====

REMOTE/TESTER RUN

Versions: SW v3.00 FW v3.01 Str v3.00 CEMASTER
Operator: Uriah Higgins
Sequence File: ITE AC Dips EN 61000-4-11.SEQ
EUT: Aleph LulzBot Juniperberry

=====

230 VAC

01:04:57P SEQUENCE START

SEQUENCE	TYPE	SEQUENCE DESCRIPTION					
PQF	User Defined	ITE Equipment					
	Test Level	Phs Ang	Dur. Value	Duration	Tests	Delay	
01:04:57P	0% Open	0 deg.	0.50	cyc	3	10 sec.	
01:05:33P	0% Open	90 deg.	0.50	cyc	3	10 sec.	
01:06:08P	0% Open	180 deg.	0.50	cyc	3	10 sec.	
01:06:43P	0% Open	270 deg.	0.50	cyc	3	10 sec.	
01:07:18P	70% Dip	0 deg.	25.00	cyc	3	10 sec.	
01:07:55P	70% Dip	90 deg.	25.00	cyc	3	10 sec.	
01:08:31P	70% Dip	180 deg.	25.00	cyc	3	10 sec.	
01:09:07P	70% Dip	270 deg.	25.00	cyc	3	10 sec.	
01:09:43P	0% Open	0 deg.	250.00	cyc	3	10 sec.	
01:10:31P	0% Open	180 deg.	250.00	cyc	3	10 sec.	
01:11:18P	SEQUENCE COMPLETE						

Printer continued to print throughout the test, and resumed printing once power was restored.

Test Specification: EN 55022:2010 and EN 55024:2010
Model Name of EUT: LulzBot Juniperberry
Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EMITestLab.com

Revision 1.0

EMI Test Lab LLC

Electro Magnetic Interference Testing
EmiTestLab.com



Test setup according to EN 61000-4-11

Test Specification: EN 55022:2010 and EN 55024:2010

Model Name of EUT: LulzBot Juniperberry

Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EMI Test Lab.com


Revision 1.0



3.3.5 Power Frequency Magnetic Fields

The susceptibility of the EUT to power frequency magnetic fields has been tested in conformity with and according to the criteria as stated below.


Basic Standard : EN 55024:2010
Test setup : EN61000-4-8
Test level : 1 Amp per meter, X,Y and Z axis

Results of the test concerning the susceptibility of the EUT to	<u>Not Applicable</u>
Name of Test Engineer:	Dennis King
Signature:	
Date:	10 June 2015
Remarks:	There are no magnetically sensitive components in this product.



4.0 Modifications

Previous mods on the TAZ5

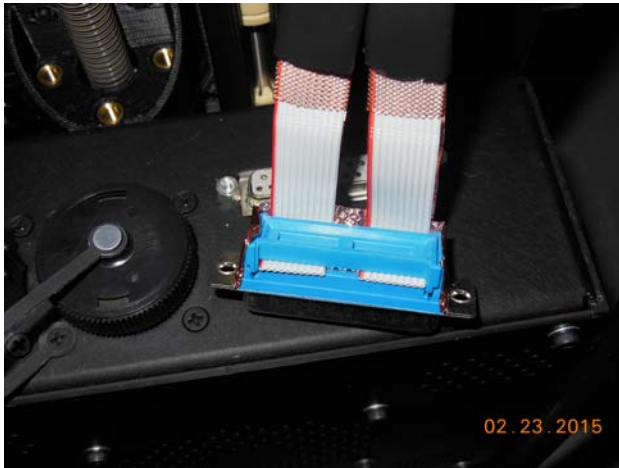

A blue LCD cable connector was used during emissions testing, changing from a more expensive version of the same connector. The results were the same or better using the less expensive connector.




Copper tape was added to the ribbon cable shielding to connect the shield to the metal of the connector in order to get a chassis ground connection.



EMI Test Lab LLC

Electro Magnetic Interference Testing
EmiTestLab.com

Juniperberry modifications

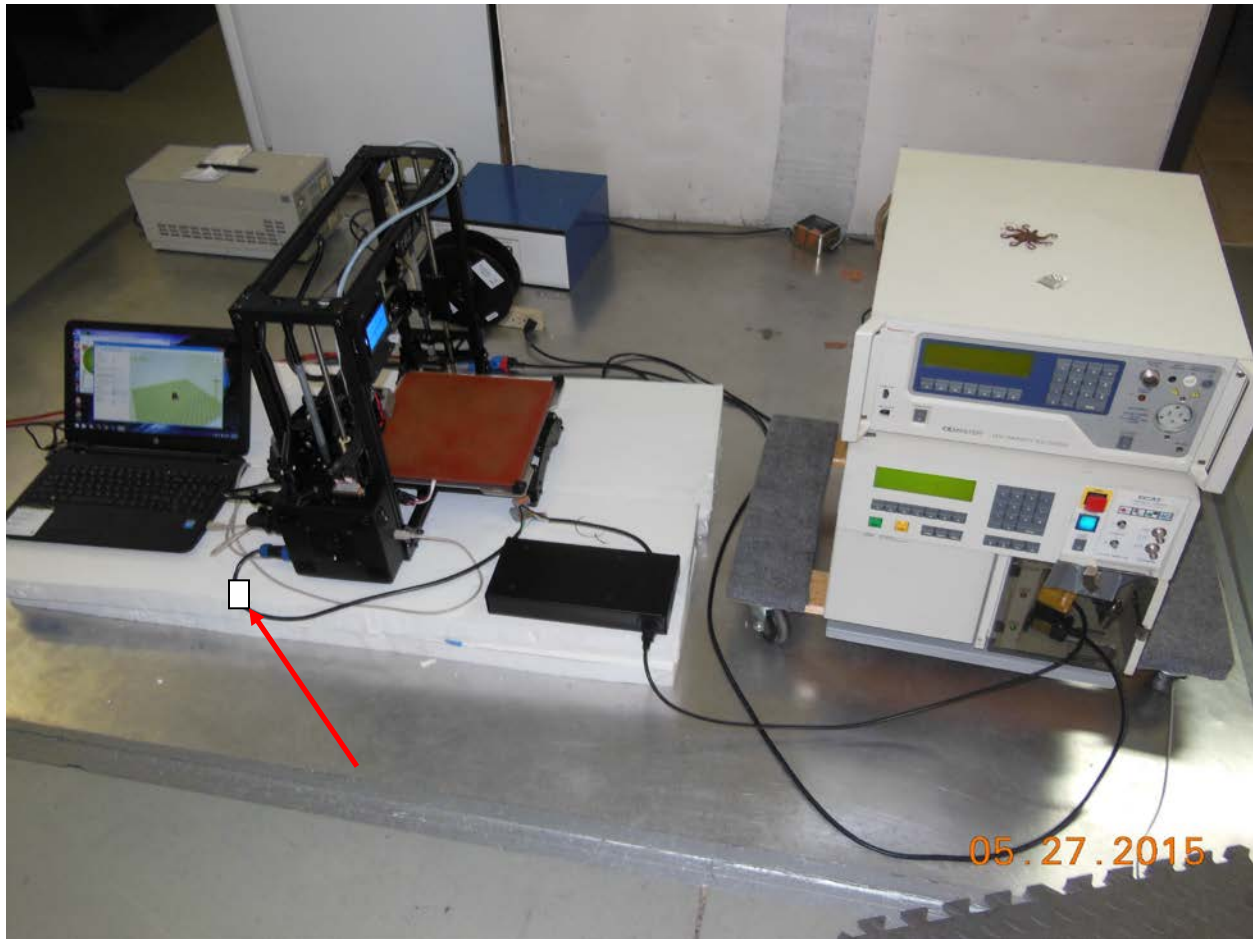

To pass EFT/Burst EN 61000-4-4 two methods were tested and both passed. A clamp on ferrite P/N 28A2029-0A0 was added to the DC cable between the power supply and the printer. It passes when located at either end.

Test Specification: EN 55022:2010 and EN 55024:2010

Model Name of EUT: LulzBot Juniperberry

Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EMI Test Lab.com

Revision 1.0



EMI Test Lab LLC

Electro Magnetic Interference Testing
EmiTestLab.com



A second method was with a ferrite located inside the power supply housing, 3 turns on the ferrite. All the dc wires were wrapped using Steward ferrite P/N 28B1417-200.

Test Specification: EN 55022:2010 and EN 55024:2010
Model Name of EUT: LulzBot Juniperberry
Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EmiTestLab.com

Revision 1.0



5.0 Test equipment and Environmental Conditions

All tests were conducted within parameters specified for each test, for example >30% humidity for ESD. The lab temperature during all testing was between 70-72 degrees F.

All equipment used for testing has been calibrated or verified for cal using NIST traceable standards. Each piece of test equipment has a cal verification procedure that is conducted before and after each test.

Table of Test Equipment

Equipment	Description and Test	Model number	Serial number	Next cal due
HP Spectrum Analyzer	Used for Radiated and Conducted Emissions	8566B	2607A02760	3 June 2016
HP Quasi-Peak Adapter	Used for Radiated and Conducted Emissions	85650A	8574A00233	3 June 2016
Advantest Spectrum Analyzer	Used for Radiated and Conducted Emissions	R3361A	01730556	20 October 2015
Com-Power transient Limiter	Conducted Emissions	HZ560	001	3 June 2016
Miteq Pre-Amp	Radiated Emissions	1381	544407	20 October 2015
RF Bay Pre-Amp	Radiated emissions – 100kHz to 10 GHz	LPA-10-20	0643	2 Dec 2015
GTEM	Radiated Emissions and Radiated Immunity	5317	9703-1209	25 April 2016 – Field Uniformity Cal per IEC 61000-4-20
3 Meter FAR – Fully Anechoic Room	Radiated Immunity and Emissions	N/A	FAR #1	15 October 2015 Field Uniformity per IEC/EN 61000-4-3 and Correlation data to GTEM
ComPower Horn Antenna	1-18 GHz – Radiated Immunity and Emissions	AH 118	071040	20 March 2016
Chase BiLog Antenna	Radiated Emissions and Immunity	CBL6111	1121	20 March 2016
Marconi Instruments – Signal Generator	Radiated Immunity	2031	1196061031	20 October 2015

Test Specification: EN 55022:2010 and EN 55024:2010

Prepared by EMI Test Lab - EMI Test Lab.com

Model Name of EUT: LulzBot Juniperberry

Manufacturer: Aleph Objects Inc.

Revision 1.0



EMI Test Lab LLC

Electro Magnetic Interference Testing
 EmiTestLab.com

10kHz – 2.7 GHz				
HP Signal Generator	Radiated Immunity	8657A	STD0578	3 May 2016
HP Synthesized Sweep Generator .01-20 GHz	Radiated Immunity 1 GHz to 2.7 GHz	83752B	34462	3 May 2016
Amplifier Research .800 – 4.2 GHz Amp	Radiated Immunity – 1 GHz to 2.7 GHz	10S1G4	34516	4 May 2016
Antenna Research Associates – 100 Watt amplifier w/controller	Radiated Immunity – 80-1000 MHz in the FAR	ARAPS/PC757LC ARA757LC-CE	587V7 587V7	20 October 2015
Kalmus Power Amplifier	Radiated Immunity 150kHz – 1 GHz – in the GTEM	747LC-CE	7894-1	12 May 2016
Amplifier Research E- Field Probe	Radiated Immunity	FP 2000	12845	12 May 2016
Com-Power LISN	Conducted emissions	LI-115	241010	17 May 2016
Com-Power LISN	Conducted emissions	LI-115	241011	17 May 2016
California Instruments 1000 VA Power Source	Emissions and Immunity - used as a 100/120/230/240-VAC 50/60 Hz AC source	1001WP	L04788	4 June 2016
EMI Labs CDN	Conducted Immunity	EMICDN	001	9 Dec 2015
Schaffner ESD Gun	Electro Static Discharge	NSG435	54711	11 Dec 2015
KeyTek ECAT	Fast transients / Burst	E412	32612	5 June 2016
FCC Inc. RF Current Probe	Monitor Conducted Immunity signal	F-33-1	423	9 Dec 2015
EMI Labs Mag Loop	Magnetic Loop Antenna	Mag100	80162	12 Dec 2015
Thermo Keytek CE Master	Surge/ AC Dips and Interrupts	CE Master	0405277	15 Dec 2015

Test Specification: EN 55022:2010 and EN 55024:2010

Prepared by EMI Test Lab - EmiTestLab.com

Model Name of EUT: LulzBot Juniperberry

Manufacturer: Aleph Objects Inc.

Revision 1.0



6.0 Measurement Uncertainty - Radiated Emissions example;

Table of Uncertainty Calculation					
√	Contribution	Designation	Probability Distribution	k	Uncertainty (dB)
	Equipment Under Test Uncertainties	U_{EUT}			Note 1
√	Measuring Receiver Amplitude Accuracy	$U_{RXaccuracy}$	rectangular	$\sqrt{3}$	± 0.9
√	GTEM Uniformity	$U_{Uniformity}$	rectangular	$\sqrt{3}$	± 4.0
√	Secondary Field Components	$U_{Secondary}$			Excluded by Test Method
√	Mismatch Uncertainty-GTEM to Pre-Amplifier	$U_{Mismatch}$	U-shaped	$\sqrt{2}$	+0.63 and -0.65
√	Mismatch Uncertainty-Pre-Amplifier to Spectrum Analyzer	$U_{Mismatch}$	U-shaped	$\sqrt{2}$	+0.92 and -1.03
√	System Sensitivity Error	$U_{Sensitivity}$	rectangular	$\sqrt{3}$	0.28
√	GTEM Electric-Field Frequency Response	$U_{E-Field}$	rectangular	$\sqrt{3}$	± 1.6
	Ambient Signal Uncertainty	U_{Abient}			Not Significant
√	GTEM to OATS Correlation	U_{Corr}	rectangular	$\sqrt{3}$	±1.2
√	Septum Height Variation	U_{Septum}	normal	2	+0.72 and -0.82
	Coaxial Cable Temperature Variations	$U_{CableTemperature}$			Not Significant
√	Coaxial Cable Calibration	$U_{CableCalibration}$	rectangular	$\sqrt{3}$	±0.05
√	Pre-amplifier Calibration Uncertainty	$U_{Pre-Amp}$	rectangular	$\sqrt{3}$	±0.05
	Combined Uncertainty(dB) Positive Terms				2.77
	Combined Uncertainty(dB) Negative Terms				-2.75
	Expanded Uncertainty Positive Terms		Normal	2	5.54
	Expanded Uncertainty Negative Terms		Normal	2	-5.50

EMI Test Lab LLC

Electro Magnetic Interference Testing
EmiTestLab.com



Typical Measurement Uncertainty for the following Tests:

The estimated combined standard uncertainty for ESD testing, EN 61000-4-2 is $\pm 4\%$
The estimated combined standard uncertainty for Radiated Immunity, EN 61000-4-3 is $\pm 2.7\text{dB}$
The estimated combined standard uncertainty for EFT/Burst, EN 61000-4-4 is $\pm 5.8\%$
The estimated combined standard uncertainty for Surge, EN 61000-4-5 is $\pm 8\%$
The estimated combined standard uncertainty for Conducted Immunity, EN 61000-4-6 is $\pm 1.5\text{ dB}$
The estimated combined standard uncertainty for Magnetic Fields, EN 61000-4-8 is $\pm 0.6\%$
The estimated combined standard uncertainty for Voltage Dips and Interrupts, EN 61000-4-11 is $\pm 4.3\%$
The estimated combined standard uncertainty for Conducted Emissions, CISPR 11 is $\pm 1.2\text{dB}$
The estimated combined standard uncertainty for Harmonic current and flicker is $\pm 11.6\%$

Test Specification: EN 55022:2010 and EN 55024:2010

Model Name of EUT: LulzBot Juniperberry

Manufacturer: Aleph Objects Inc.

Prepared by EMI Test Lab - EmiTestLab.com

Revision 1.0



7.0 Test Plan

Testing required

The LulzBot JUNIPERBERRY 3D Printer will be tested for Class A Emissions per EN 55022 and all applicable Immunity tests per EN 55024 for immunity as required for the EMC portion of the CE Mark.

Test Setup

The LulzBot JUNIPERBERRY will be operating in a typical use mode, printing an object during all the testing.

The user software is installed on a laptop and is controlling the 3D printer. There are no other I/O cables on the 3D Printer.

Typical software that the end user would use will be used during the testing.

Failure Criteria

If the unit stops working or the printing process is altered by the injected noise, this would be considered a failure.

I/O cables

The unit has only one I/O cable, the USB cable that is used to control the printer from software installed on the host computer. There are no I/O cables on the unit 3 meters or longer.

Status of the test unit

Production level.



8.0 Conclusion

**The Aleph Objects – LulzBot JUNIPERBERRY 3D Printer
complies with the emissions standard EN 55022:2010
and the immunity standard EN 55024:2010
in the configurations and operating modes as stated in this test report.**

End of Report