


**Anbotek Compliance Laboratory Limited**

**Voltage Mains EN5022 CLASS B**

EUT: XXXX M/N:24V 16.6A 1#  
 Manufacturer: XXXX  
 Operating Condition: FULL LOAD  
 Test Site: 1# Shielded Room  
 Operator: Allen Peng  
 Test Specification: AC 110V/60HZ  
 Comment: L  
 Temp.=22.2 Hum.=55%

**SCAN TABLE: "Voltage(150K~30M)FIN"**

Short Description: 150K-30M Disturbance Voltages

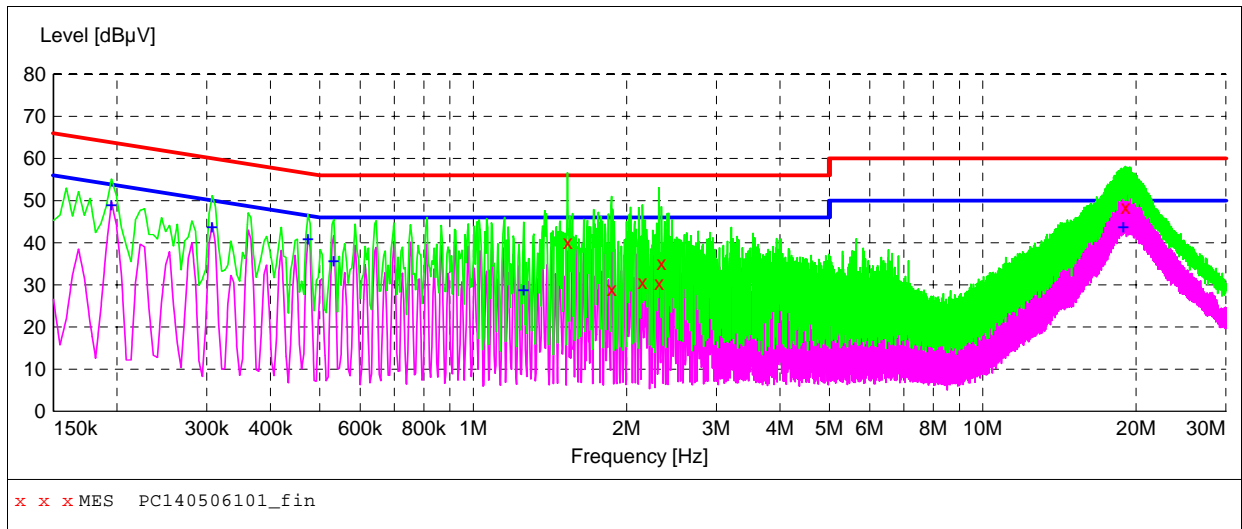

**MEASUREMENT RESULT: "PC140506101\_fin"**

5/6/2014 1:51PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
1.531000	40.10	20.3	56	15.9	QP	L1	GND
1.868500	29.00	20.3	56	27.0	QP	L1	GND
2.147500	30.60	20.3	56	25.4	QP	L1	GND
2.314000	30.40	20.3	56	25.6	QP	L1	GND
2.341000	35.10	20.3	56	20.9	QP	L1	GND
19.049500	48.40	20.8	60	11.6	QP	L1	GND

**MEASUREMENT RESULT: "PC140506101\_fin2"**

5/6/2014 1:51PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.195000	49.20	20.1	54	4.6	AV	L1	GND
0.307500	43.80	20.1	50	6.2	AV	L1	GND
0.474000	41.10	20.1	46	5.3	AV	L1	GND
0.532500	35.80	20.1	46	10.2	AV	L1	GND
1.256500	29.00	20.2	46	17.0	AV	L1	GND
18.883000	43.90	20.8	50	6.1	AV	L1	GND