


Anbotek Compliance Laboratory Limited

Voltage Mains EN 55022 CLASS B

EUT: XXXX M/N:24V,16.6A
 Manufacturer: XXXX
 Operating Condition: FULL LOAD
 Test Site: 1# Shielded Room
 Operator: Allen Peng
 Test Specification: AC 230V/50Hz
 Comment: N
 Temp.=22.2 Hum.=55%

SCAN TABLE: "Voltage(150K~30M)FIN"

Short Description: 150K-30M Disturbance Voltages

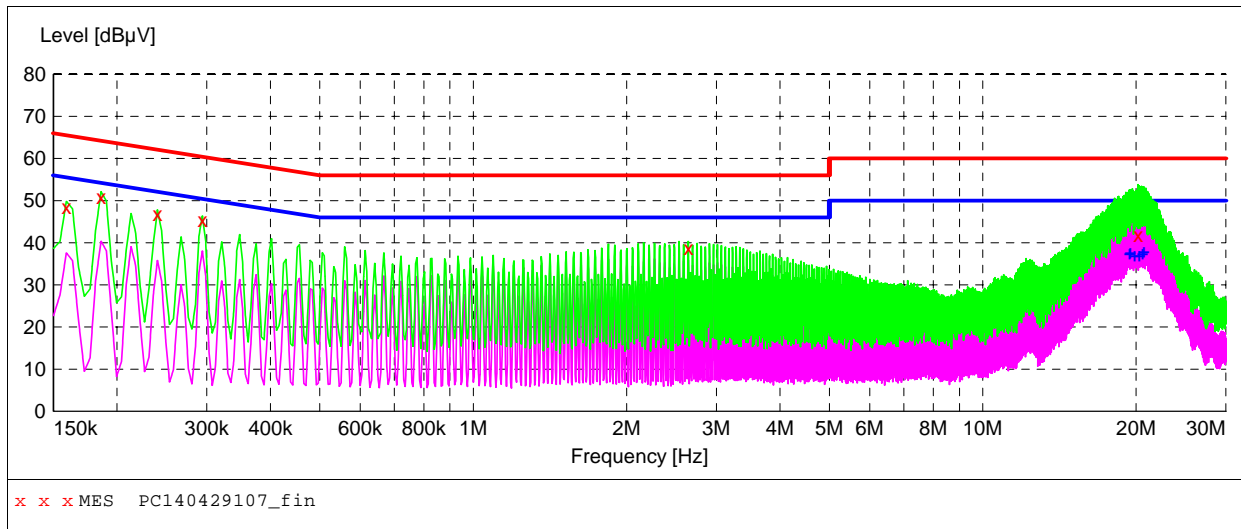

MEASUREMENT RESULT: "PC140429107_fin"

4/29/2014 5:48PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.159000	48.40	20.1	66	17.1	QP	N	GND
0.186000	50.90	20.1	64	13.3	QP	N	GND
0.240000	46.90	20.1	62	15.2	QP	N	GND
0.294000	45.30	20.1	60	15.1	QP	N	GND
2.642500	38.80	20.4	56	17.2	QP	N	GND
20.156500	41.70	20.8	60	18.3	QP	N	GND

MEASUREMENT RESULT: "PC140429107_fin2"

4/29/2014 5:48PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
19.436500	37.60	20.8	50	12.4	AV	N	GND
19.490500	37.80	20.8	50	12.2	AV	N	GND
19.864000	37.20	20.8	50	12.8	AV	N	GND
20.291500	37.20	20.8	50	12.8	AV	N	GND
20.611000	37.60	20.8	50	12.4	AV	N	GND
20.719000	37.90	20.8	50	12.1	AV	N	GND