


Anbotek Compliance Laboratory Limited

Voltage Mains EN55022 CLASS B

EUT: XXXX M/N:24V 16.6A 1#
 Manufacturer: XXXX
 Operating Condition: FULL LOAD
 Test Site: 1# Shielded Room
 Operator: Allen Peng
 Test Specification: AC 110V/60HZ
 Comment: N
 Temp.=22.2 Hum.=55%

SCAN TABLE: "Voltage(150K~30M)FIN"

Short Description: 150K-30M Disturbance Voltages

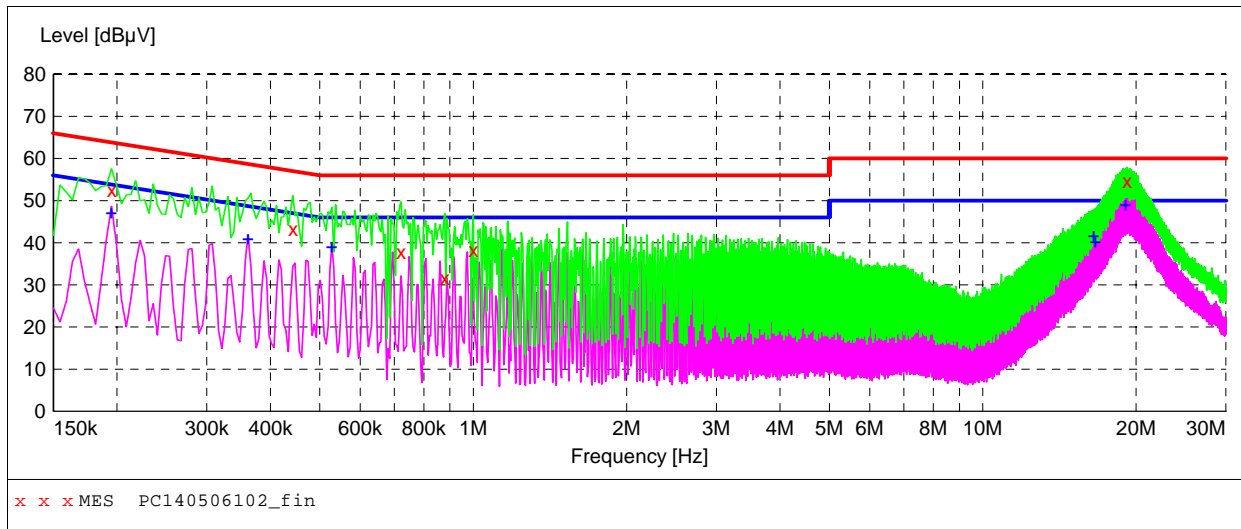

MEASUREMENT RESULT: "PC140506102_fin"

5/6/2014 1:55PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.195000	52.50	20.1	64	11.3	QP	N	GND
0.442500	43.20	20.1	57	13.8	QP	N	GND
0.721500	37.80	20.1	56	18.2	QP	N	GND
0.879000	31.70	20.1	56	24.3	QP	N	GND
1.000000	38.10	20.2	56	17.9	QP	N	GND
19.180000	54.70	20.8	60	5.3	QP	N	GND

MEASUREMENT RESULT: "PC140506102_fin2"

5/6/2014 1:55PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.195000	47.20	20.1	54	6.6	AV	N	GND
0.361500	41.20	20.1	49	7.5	AV	N	GND
0.528000	39.30	20.1	46	6.7	AV	N	GND
16.516000	41.70	20.7	50	8.3	AV	N	GND
16.628500	40.30	20.7	50	9.7	AV	N	GND
19.099000	49.20	20.8	50	0.8	AV	N	GND