


Anbotek Compliance Laboratory Limited

Voltage Mains EN55022 CLASS B

EUT: XXXX M/N:24V 16.6A 1#
 Manufacturer: XXXX
 Operating Condition: FULL LOAD
 Test Site: 1# Shielded Room
 Operator: Allen Peng
 Test Specification: AC 230V/50HZ
 Comment: L
 Temp.=22.2 Hum.=55%

SCAN TABLE: "Voltage(150K~30M)FIN"

Short Description: 150K-30M Disturbance Voltages

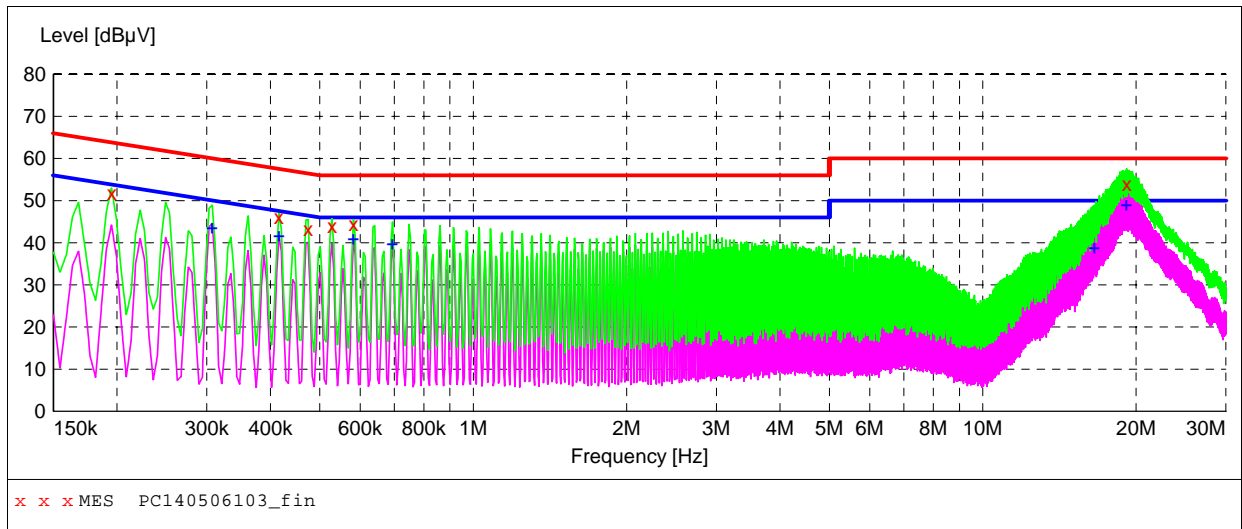

MEASUREMENT RESULT: "PC140506103_fin"

5/6/2014 1:58PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.195000	51.70	20.1	64	12.1	QP	L1	GND
0.415500	46.10	20.1	58	11.4	QP	L1	GND
0.474000	43.20	20.1	56	13.2	QP	L1	GND
0.528000	44.00	20.1	56	12.0	QP	L1	GND
0.582000	44.30	20.1	56	11.7	QP	L1	GND
19.166500	53.90	20.8	60	6.1	QP	L1	GND

MEASUREMENT RESULT: "PC140506103_fin2"

5/6/2014 1:58PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.307500	43.60	20.1	50	6.4	AV	L1	GND
0.415500	41.70	20.1	48	5.8	AV	L1	GND
0.582000	41.10	20.1	46	4.9	AV	L1	GND
0.694500	40.00	20.1	46	6.0	AV	L1	GND
16.561000	38.90	20.7	50	11.1	AV	L1	GND
19.139500	49.10	20.8	50	0.9	AV	L1	GND