


Anbotek Compliance Laboratory Limited

Voltage Mains EN55022 CLASS B

EUT: XXXX M/N:24V 16.6A 1#
 Manufacturer: XXXX
 Operating Condition: FULL LOAD
 Test Site: 1# Shielded Room
 Operator: Allen Peng
 Test Specification: AC 230V/50HZ
 Comment: N
 Temp.=22.2 Hum.=55%

SCAN TABLE: "Voltage(150K~30M)FIN"

Short Description: 150K-30M Disturbance Voltages

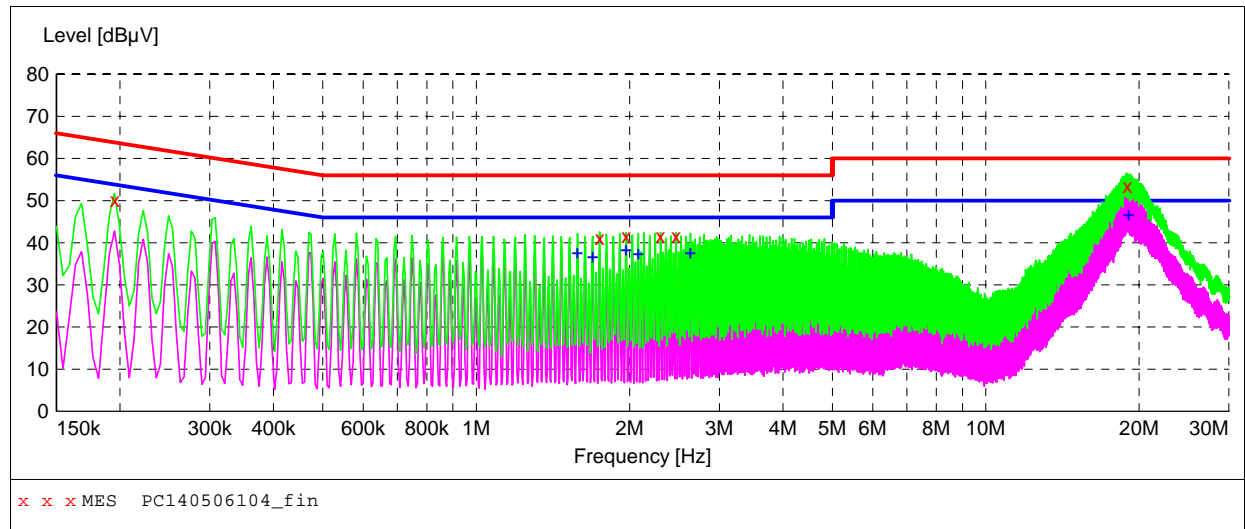

MEASUREMENT RESULT: "PC140506104_fin"

5/6/2014 2:01PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.195000	50.20	20.1	64	13.6	QP	N	GND
1.747000	41.20	20.3	56	14.8	QP	N	GND
1.967500	41.60	20.3	56	14.4	QP	N	GND
2.300500	41.60	20.3	56	14.4	QP	N	GND
2.467000	41.60	20.3	56	14.4	QP	N	GND
18.959500	53.40	20.8	60	6.6	QP	N	GND

MEASUREMENT RESULT: "PC140506104_fin2"

5/6/2014 2:01PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
1.580500	37.80	20.3	46	8.2	AV	N	GND
1.693000	36.90	20.3	46	9.1	AV	N	GND
1.967500	38.40	20.3	46	7.6	AV	N	GND
2.080000	37.50	20.3	46	8.5	AV	N	GND
2.633500	37.80	20.4	46	8.2	AV	N	GND
19.072000	46.70	20.8	50	3.3	AV	N	GND