


Anbotek Compliance Laboratory Limited

Voltage Mains EN55022 CLASS B

EUT: XXXX M/N:24V 16.6A 3#
 Manufacturer: XXXX
 Operating Condition: FULL LOAD
 Test Site: 1# Shielded Room
 Operator: Allen Peng
 Test Specification: AC 230V/50HZ
 Comment: L
 Temp.=22.2 Hum.=55%

SCAN TABLE: "Voltage(150K~30M)FIN"

Short Description: 150K-30M Disturbance Voltages

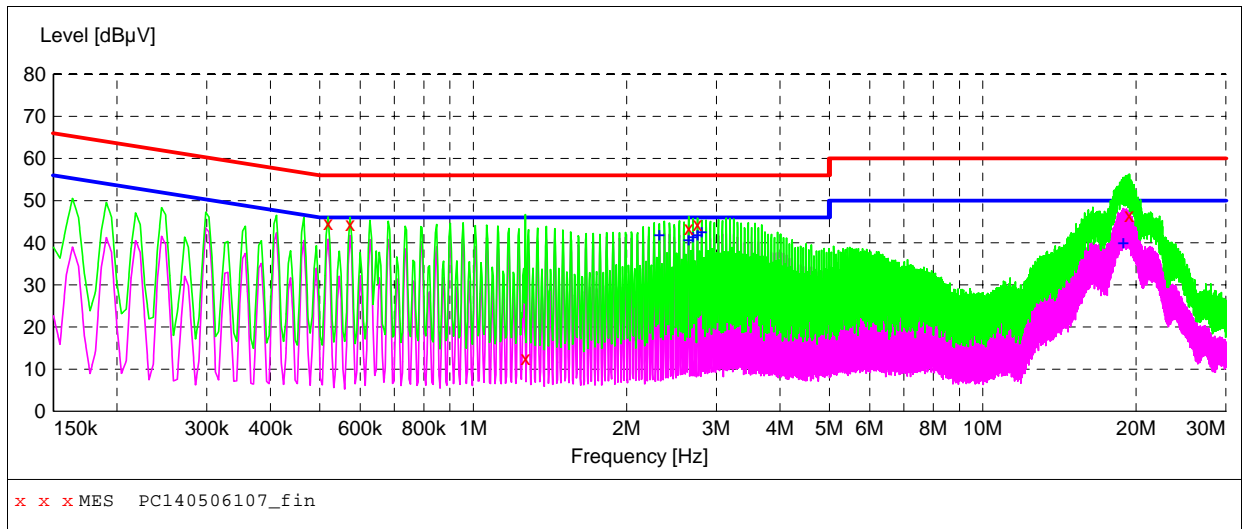

MEASUREMENT RESULT: "PC140506107_fin"

5/6/2014 2:16PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.519000	44.60	20.1	56	11.4	QP	L1	GND
0.573000	44.50	20.1	56	11.5	QP	L1	GND
1.265500	12.60	20.2	56	43.4	QP	L1	GND
2.647000	43.40	20.4	56	12.6	QP	L1	GND
2.755000	44.50	20.4	56	11.5	QP	L1	GND
19.364500	46.60	20.8	60	13.4	QP	L1	GND

MEASUREMENT RESULT: "PC140506107_fin2"

5/6/2014 2:16PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
2.318500	42.00	20.3	46	4.0	AV	L1	GND
2.647000	40.90	20.4	46	5.1	AV	L1	GND
2.701000	41.50	20.4	46	4.5	AV	L1	GND
2.755000	42.00	20.4	46	4.0	AV	L1	GND
2.809000	42.80	20.4	46	3.2	AV	L1	GND
18.874000	40.10	20.8	50	9.9	AV	L1	GND