


Anbotek Compliance Laboratory Limited

Voltage Mains EN55022 CLASS B

EUT: XXXX M/N:24V 16.6A 3#
 Manufacturer: XXXX
 Operating Condition: FULL LOAD
 Test Site: 1# Shielded Room
 Operator: Allen Peng
 Test Specification: AC 230V/50HZ
 Comment: N
 Temp.=22.2 Hum.=55%

SCAN TABLE: "Voltage(150K~30M)FIN"

Short Description: 150K-30M Disturbance Voltages

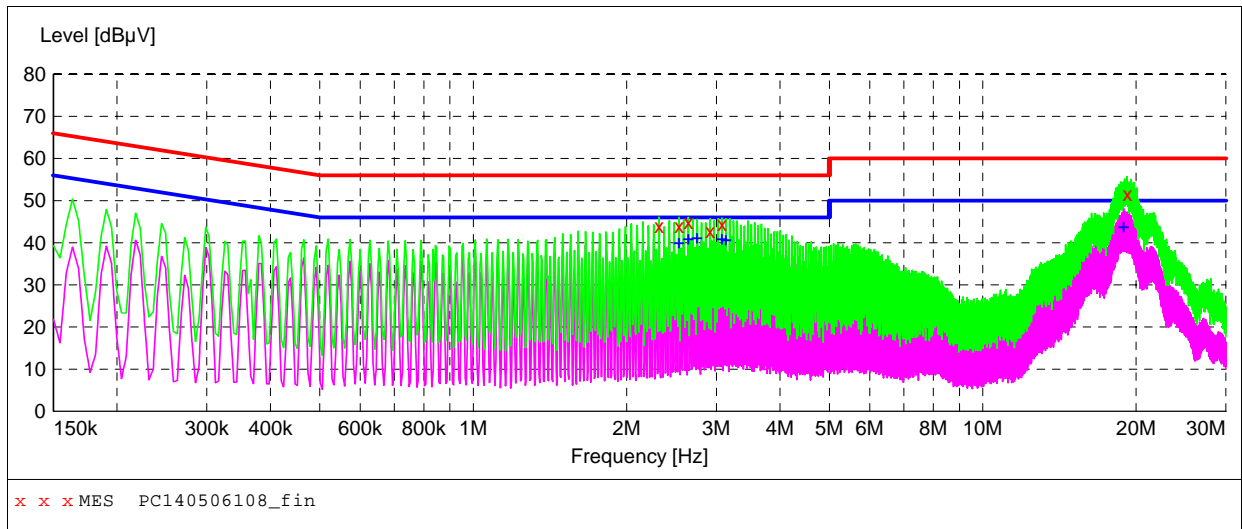

MEASUREMENT RESULT: "PC140506108_fin"

5/6/2014 2:20PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
2.314000	44.00	20.3	56	12.0	QP	N	GND
2.534500	44.00	20.4	56	12.0	QP	N	GND
2.642500	44.90	20.4	56	11.1	QP	N	GND
2.917000	42.80	20.4	56	13.2	QP	N	GND
3.079000	44.50	20.4	56	11.5	QP	N	GND
19.202500	51.60	20.8	60	8.4	QP	N	GND

MEASUREMENT RESULT: "PC140506108_fin2"

5/6/2014 2:20PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
2.534500	40.20	20.4	46	5.8	AV	N	GND
2.642500	41.20	20.4	46	4.8	AV	N	GND
2.750500	41.40	20.4	46	4.6	AV	N	GND
3.079000	41.10	20.4	46	4.9	AV	N	GND
3.133000	40.80	20.4	46	5.2	AV	N	GND
18.905500	43.80	20.8	50	6.2	AV	N	GND