


Anbotek Compliance Laboratory Limited

Voltage Mains EN55022 CLASS B

EUT: XXXX M/N:24V 16.6A 2#
 Manufacturer: XXXX
 Operating Condition: FULL LOAD
 Test Site: 1# Shielded Room
 Operator: Allen Peng
 Test Specification: AC 230V/50HZ
 Comment: L
 Temp.=22.2 Hum.=55%

SCAN TABLE: "Voltage(150K~30M)FIN"

Short Description: 150K-30M Disturbance Voltages

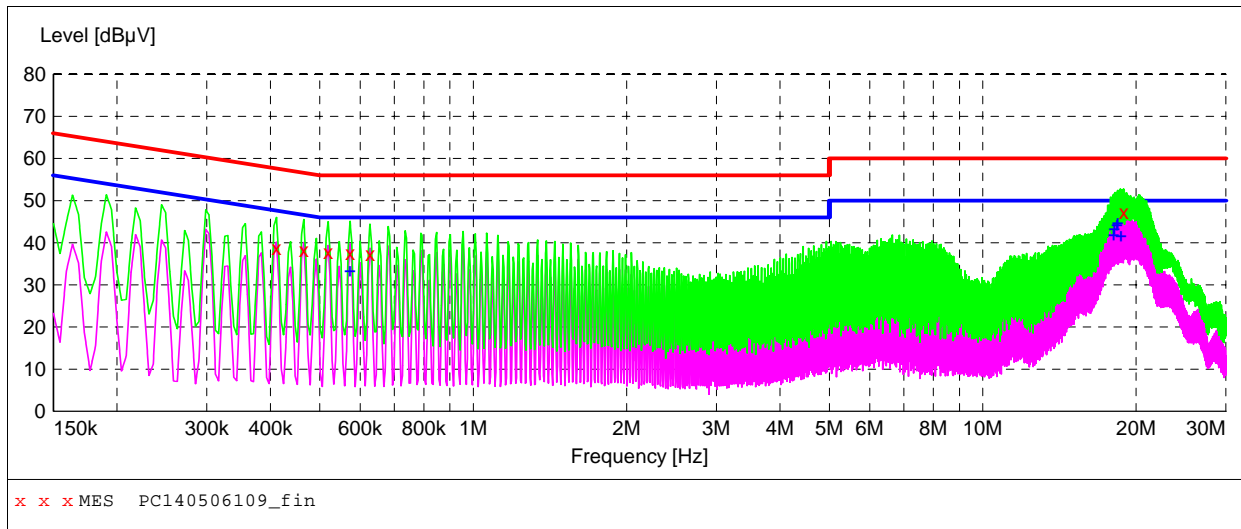

MEASUREMENT RESULT: "PC140506109_fin"

5/6/2014 2:28PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.411000	38.70	20.1	58	18.9	QP	L1	GND
0.465000	38.10	20.1	57	18.5	QP	L1	GND
0.519000	37.70	20.1	56	18.3	QP	L1	GND
0.573000	37.60	20.1	56	18.4	QP	L1	GND
0.627000	37.20	20.1	56	18.8	QP	L1	GND
18.896500	47.30	20.8	60	12.7	QP	L1	GND

MEASUREMENT RESULT: "PC140506109_fin2"

5/6/2014 2:28PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.573000	33.50	20.1	46	12.5	AV	L1	GND
18.082000	42.00	20.8	50	8.0	AV	L1	GND
18.136000	43.50	20.8	50	6.5	AV	L1	GND
18.352000	44.40	20.8	50	5.6	AV	L1	GND
18.406000	44.90	20.8	50	5.1	AV	L1	GND
18.680500	41.70	20.8	50	8.3	AV	L1	GND