


Anbotek Compliance Laboratory Limited

Voltage Mains EN55022 CLASS B

EUT: XXXX M/N:24V 16.6A 2#
 Manufacturer: XXXX
 Operating Condition: FULL LOAD
 Test Site: 1# Shielded Room
 Operator: Allen Peng
 Test Specification: AC 230V/50HZ
 Comment: L
 Temp.=22.2 Hum.=55%

SCAN TABLE: "Voltage(150K~30M)FIN"

Short Description: 150K-30M Disturbance Voltages

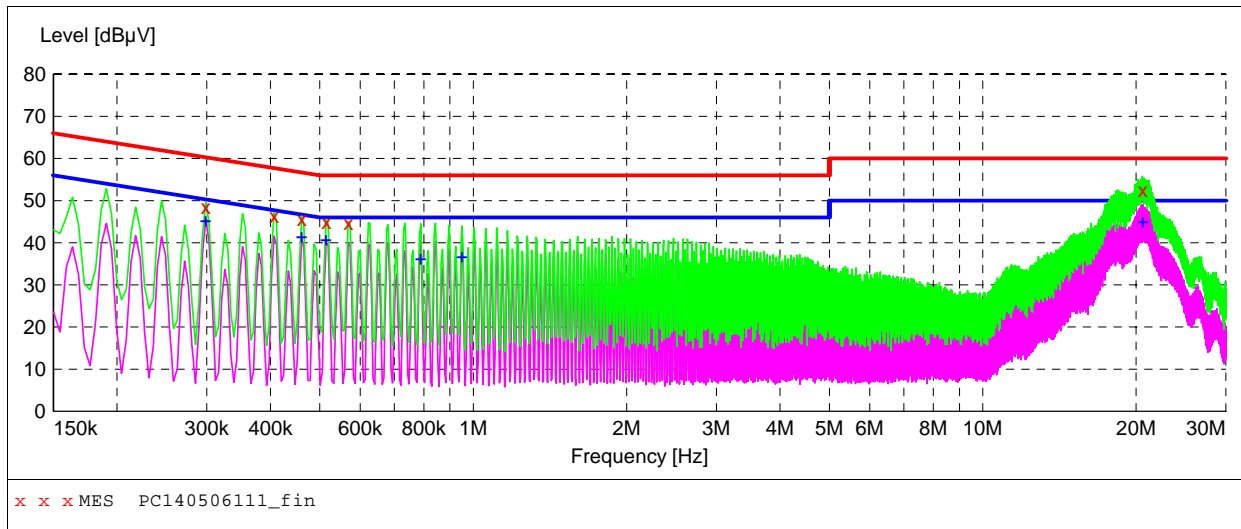

MEASUREMENT RESULT: "PC140506111_fin"

5/6/2014 4:58PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.298500	48.40	20.1	60	11.9	QP	L1	GND
0.406500	46.30	20.1	58	11.4	QP	L1	GND
0.460500	45.50	20.1	57	11.2	QP	L1	GND
0.514500	45.00	20.1	56	11.0	QP	L1	GND
0.568500	44.80	20.1	56	11.2	QP	L1	GND
20.579500	52.50	20.8	60	7.5	QP	L1	GND

MEASUREMENT RESULT: "PC140506111_fin2"

5/6/2014 4:58PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.298500	45.40	20.1	50	4.9	AV	L1	GND
0.460500	41.60	20.1	47	5.1	AV	L1	GND
0.514500	40.90	20.1	46	5.1	AV	L1	GND
0.789000	36.30	20.1	46	9.7	AV	L1	GND
0.951000	36.70	20.2	46	9.3	AV	L1	GND
20.633500	45.20	20.8	50	4.8	AV	L1	GND