


**Anbotek Compliance Laboratory Limited**

**Voltage Mains EN55022 CLASS B**

EUT: XXXX M/N:24V 16.6A 2#  
 Manufacturer: XXXX  
 Operating Condition: FULL LOAD  
 Test Site: 1# Shielded Room  
 Operator: Allen Peng  
 Test Specification: AC 230V/50HZ  
 Comment: N  
 Temp.=22.2 Hum.=55%

**SCAN TABLE: "Voltage(150K~30M)FIN"**

Short Description: 150K-30M Disturbance Voltages

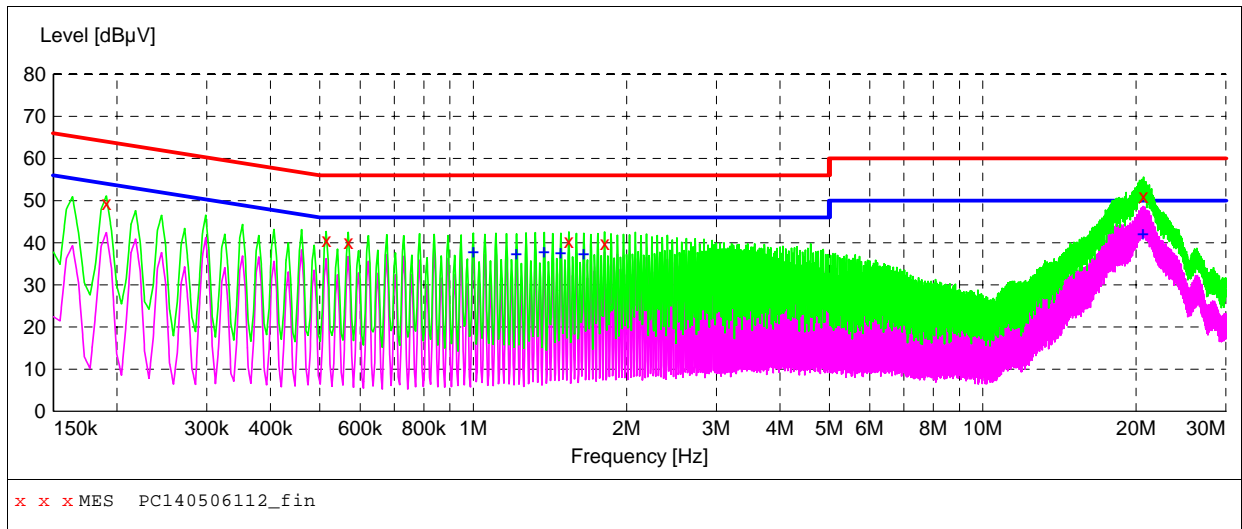

**MEASUREMENT RESULT: "PC140506112\_fin"**

5/6/2014 5:01PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.190500	49.40	20.1	64	14.6	QP	N	GND
0.514500	40.70	20.1	56	15.3	QP	N	GND
0.568500	40.20	20.1	56	15.8	QP	N	GND
1.540000	40.30	20.3	56	15.7	QP	N	GND
1.810000	39.90	20.3	56	16.1	QP	N	GND
20.687500	51.10	20.8	60	8.9	QP	N	GND

**MEASUREMENT RESULT: "PC140506112\_fin2"**

5/6/2014 5:01PM

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
1.000000	38.00	20.2	46	8.0	AV	N	GND
1.216000	37.60	20.2	46	8.4	AV	N	GND
1.378000	38.00	20.2	46	8.0	AV	N	GND
1.486000	37.80	20.3	46	8.2	AV	N	GND
1.648000	37.60	20.3	46	8.4	AV	N	GND
20.633500	42.30	20.8	50	7.7	AV	N	GND